
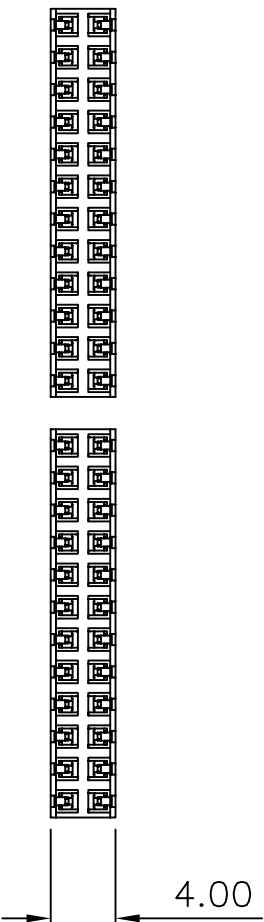
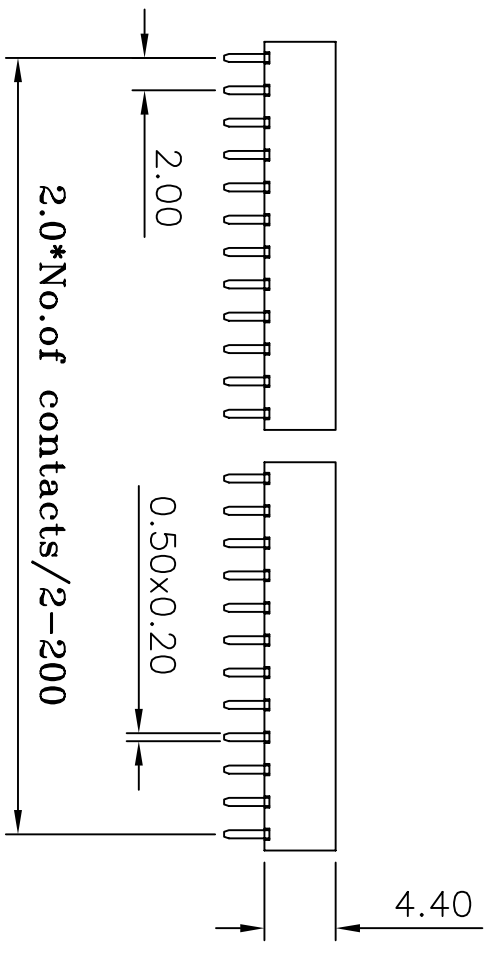


2.0 *No.of contacts/2

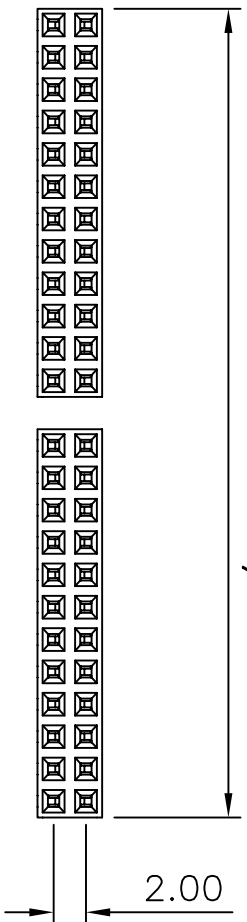

(RoHS Compliant) P2 N 44 - 2 XX S0 BK X 000 X
 1 2 3 4 5 6 7

- Standard: Nylon-6T
- Per ROW 02 to 40
- Taill Style: 50= Straight
- Color: BK=Black WH=White
- Contact Plated: D=Gold 5u", E=Gold 5u", Matte Tin 100u", T=Matte Tin over Nickel 150u", G=Gold 10u", W=Matte Tin over Nickel 150u", Y=Bright Tin over Nickel 150u", C=Gold Flash, Matte Tin 100u", F=Gold Flash, Matte Tin 100u", A=Gold 3u", B=Gold 3u", Matte Tin 100u", V=Gold 30u", Matte Tin 100u"
- Special Options: 7. Packing: B= Tube C= Troy

Current Rating: 2 Amps

Insulator Resistance: 5000 Megohms min

Contact Resistance: 20 m ohms max

Dielectric Withstanding: 500 V AC

Operating Temperature: -40° ~ +105° C

Max Processing Temp: 230° C for 60 seconds

Contact Material: 260° C for 10 seconds


Insulator Material: Phosphor Bronze

Finish: Tin, Gold Plated


Standard: Gold Flash all over

Pin-2

Pin-1

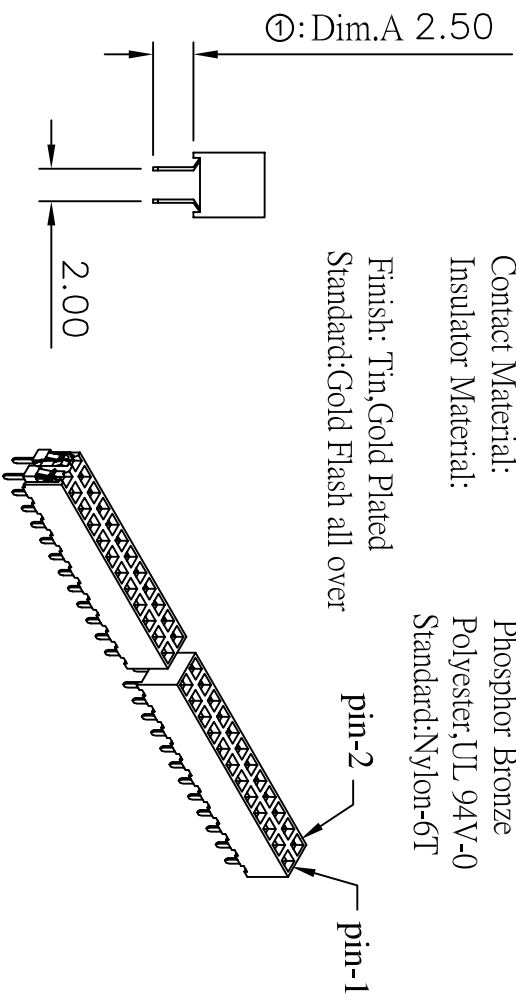

2.0 *No.of contacts/2-200

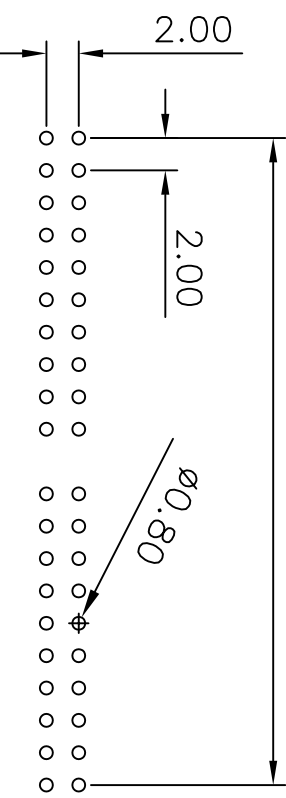

①: 2.30mm - 2007/02/26 - C		②: P2N44-2XXS0BKX000 - 2007/03/27 - C1	
CONN TOP COMPONENT INC.		PART NO	P2N44-2XXS0BKX000X
1: P2N44-2XXBKH0	DRAWING NO	P200-00026	EDITION: C2
2: P200T-203377S	DRAWN BY	LN	2009/02/20
3:	APPROVAL BY		
TEL: (02)86481727 FAX: (02)86482427		.X	.XX
		±0.3	±0.20
		ITEM: P200	SCALE: 1:1
		UNIT: m.m	