
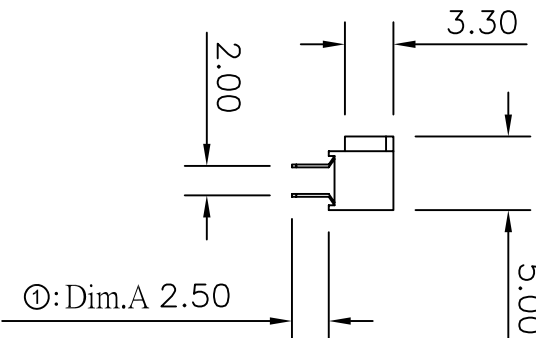
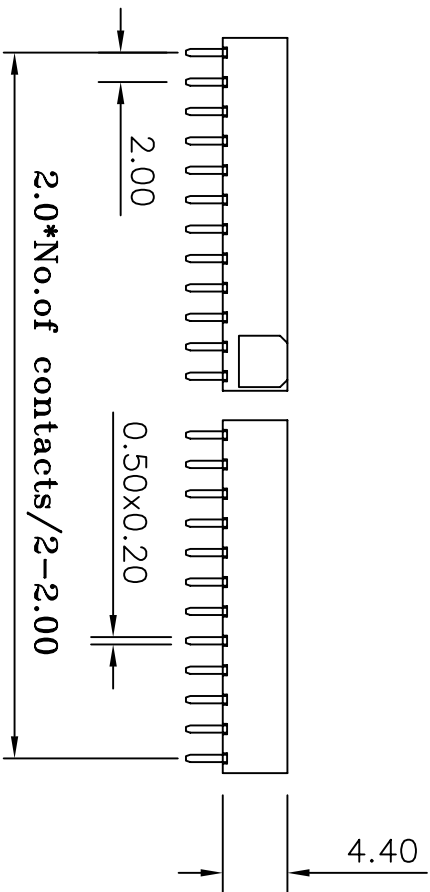



2.0*No.of contacts/2

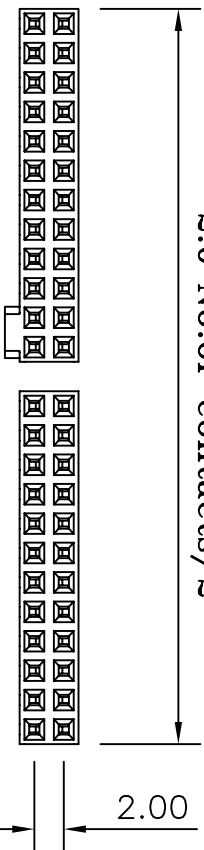

⊖: Dim.A 2.50


- Current Rating: 2 Amps
- Insulator Resistance: 5000 Megohms min
- Contact Resistance: 20 m ohms max
- Dielectric Withstanding: 500 V AC
- Operating Temperature: -40° ~ +105° C
- Max Processing Temp: 230° C for 60 seconds
- Contact Material: Phosphor Bronze
- Insulator Material: Polyester, UL 94V-0
- Standard: Nylon-6T

Finish: Tin, Gold Plated
Standard: Gold Flash all over pin-2

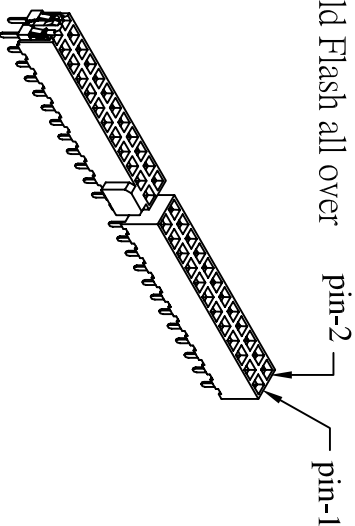

Recommended P.C. Board Hole Layout

2.0*No.of contacts/2-2.00

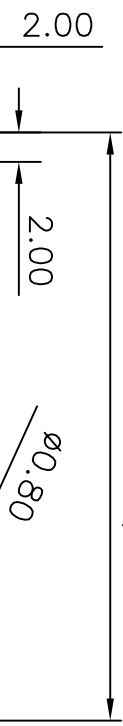

(RoHS Compliant)
P2 N 44 P - 2 XX S0 BK X 000 X
1 2 3 4 5 6 7 8

1. Standard: Nylon-6T
2. P=With Ke
3. Per ROW 03 to 40
4. TAIL Style: S0= Straight
5. Color: BK=Black WH=White
6. Contact Plated: T=Matte Tin over Nickel W=Matte Tin over Nickel Y=Bright Tin over Nickel C=Gold Flash F=Gold Flash,Matte Tin 100u" A=Gold 3u" B=Gold 3u" Matte Tin 100u"
7. Special Options: D=Gold 5u" E=Gold 5u",Matte Tin 100u" G=Gold 10u" J=Gold 10u",Matte Tin 100u" L=Gold 15u" M=Gold 15u",Matte Tin 100u" U=Gold 30u" V=Gold 30u",Matte Tin 100u"
8. Packing: B= Tube C= Tray

Ⓢ: P2N44P-2XXS0BKX000-2007/03/27 - CI
Ⓢ: 2.30mm - 2007/02/26 - C



1: P2N44P-2XXS0BKX000
2: P200T-203327S
3: TEL:(02)86481727 FAX:(02)86482427

PART NO	P2N44P-2XXS0BKX000X	.X	.XXX
DRAWING NO	P200-00028	±0.3	±0.100
DRAWN BY	LN	EDITION: C2	ITEM: P200
APPROVAL BY		2009/02/20	SCALE: 1:1
			UNIT: m.m