



Current Rating: 2 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 500 V AC
 Operating Temperature: -40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 260° C for 10 seconds
 Phosphor Bronze
 Insulator Material: Polyester, UL 94V-0
 Standard: Nylon-6T

Finish: Tin, Gold Plated
 Standard: Gold Flash all over

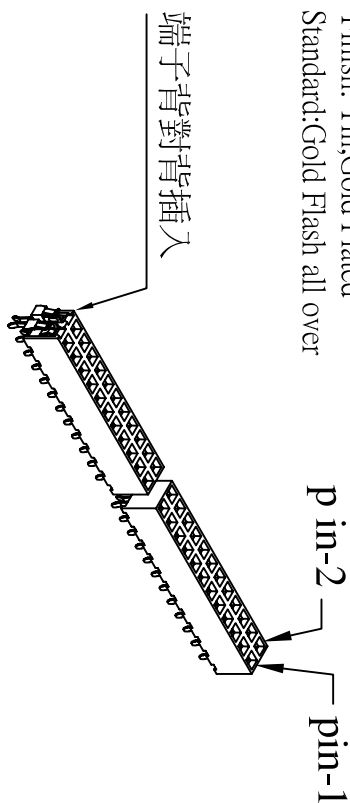

Recommended P.C. Board
 Hole Layout

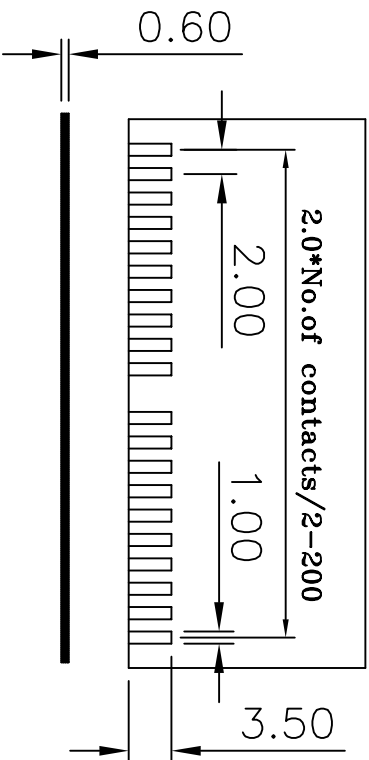

(RoHS Compliant) P 2 N 44- 2 XX SK BK X 001 X
 1 2 3 4 5 6 7

- Standard: Nylon-6T
- Per ROW 02 to 40
- Taill Style:
 - SK= Straight w/kink
 - Color: BK=Black
 - WH=White
- Contact Plated:
 - T=Matte Tin over Nickel
 - W=Matte Tin over Nickel
 - Y=Bright Tin over Nickel
 - C=Gold Flash
 - F=Gold Flash, Matte Tin
 - A=Gold 3u"
 - B=Gold 3u", Matte Tin
- Special Options:
 - D=Gold 5u"
 - E=Gold 5u", Matte Tin
 - G=Gold 10u"
 - J=Gold 10u", Matte Tin
 - L=Gold 15u"
 - M=Gold 15u", Matte Tin
 - U=Gold 30u"
 - V=Gold 30u", Matte Tin
- Packings:
 - B= Tube
 - C= Tray

②: P2N44-2XXSKBKX001-2007/06/07-C1
 ①: P2N44-2XXK0BKX001-2007/04/19-C



CONN TOP
 COMPONENT INC.

PART NO P2N44-2XXSKBKX001X

X ±0.3
 .XX ±0.20
 .XXX ±0.100

1: P2N44-2XXBKHO

DRAWING NO

P200-00069

EDITION: C2
 ITEM: P200

2: P200T-203327S

DRAWN BY

LIN

2009/02/20
 SCALE: 1:1

3: TEL:(02)86481727 FAX:(02)86482427

APPROVAL BY

UNIT: m.m