


Current Rating: 2 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 500 V AC
 Operating Temperature: -40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 260° C for 10 seconds
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester, UL 94V-0
 Standard: Nylon-6T

Finish: Tin, Gold Plated
 Standard: Gold Flash all over

端子背對背插入

pin-2
pin-1

Recommended P.C. Board
 Hole Layout

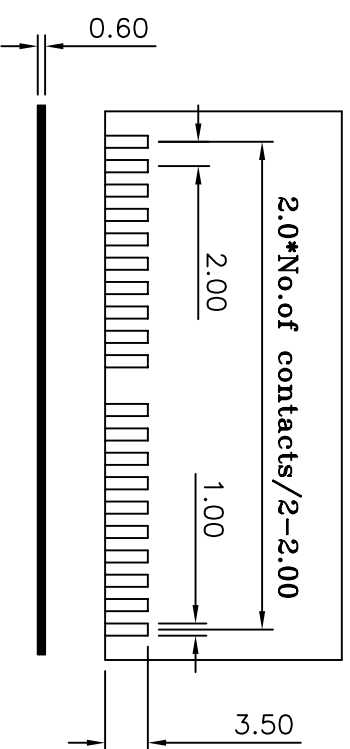

(RoHS Compliant)
 P 2 N 44 P - 2 XX SK BK X 001 X
 1 2 3 4 5 6 7 8

- Standard: Nylon-6T
- P=With Ke
- Per ROW 03 to 40
- Taill Style:
SK= Straight W/Kink
Color: BK=Black WH=White
6. Contact Plated:
T=Matte Tin over Nickel
W=Matte Tin over Nickel 150u"
Y=Bright Tin over Nickel
C=Gold Flash
F=Gold Flash,Matte Tin 100u"
A=Gold 3u"
B=Gold 3u"Matte Tin 100u"
7. Special Options
D=Gold 5u"
E=Gold 5u"Matte Tin 100u"
G=Gold 10u"
J=Gold 10u"Matte Tin 100u"
L=Gold 15u"
M=Gold 15u"Matte Tin 100u"
U=Gold 30u"
V=Gold 30u"Matte Tin 100u"
8. Packing:
B= Tube
C= Tray



CONN TOP
 COMPONENT INC.

①:P2N44P-2XXSKBKX001-2007/10/18-C

1:	P2N44P-2XXBKHO
2:	P200T-203327S
3:	

PART NO	P2N44P-2XXSKBKX001X	.X	.XXX
DRAWING NO	P200-00076	±0.3	±0.100
DRAWN BY	LIN	EDITION: C1	ITEM: P200
APPROVAL BY		2009/02/20	SCALE: 1:1
			UNIT: m.m

TEL:(02)86481727 FAX:(02)86482427