


Current Rating: 2 Amps  
 Insulator Resistance: 5000 Megohms min  
 Contact Resistance: 20 m ohms max  
 Dielectric Withstanding: 500 V AC  
 Operating Temperature: -40° ~ +105° C  
 Max Processing Temp: 230° C for 60 seconds  
 260° C for 10 seconds  
 Contact Material: Phosphor Bronze  
 Insulator Material: Polyester, UL 94V-0  
 Standard: Nylon-6T  
 Finish: Tin, Gold Plated  
 Standard: Gold Flash all over

Recommended P.C. Board  
 Hole Layout

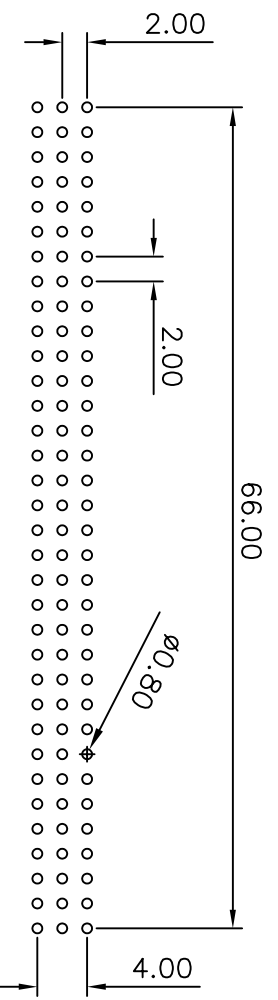

(RoHS Compliant)  
 P2 N 44 - 3 34 S0 BK X 000 C  
 1 2 3 4 5 6 7

- Standard: Nylon-6T
- Circuits: 102 pin
- Tail Style: S0 = Straight
- Color: BK=Black
- Contact Plated:
  - T=Matte Tin over Nickel
  - W=Matte Tin over Nickel
  - Y=Bright Tin over Nickel
  - C=Gold Flash
  - F=Gold Flash,Matte Tin 100u"
  - A=Gold 3u"
  - B=Gold 3u",Matte Tin 100u"
  - D=Gold 5u"
- Special Options
- Packing: C= Tray



CONN TOP  
COMPONENT INC.

PART NO	P2N44-334S0BKX000C	.X	.XXX
DRAWING NO	P200-00092	±0.3	±0.100
DRAWN BY	GARY	EDITION: C	ITEM: P200
APPROVAL BY		SCALE: 1:1	UNIT: m.m

BOM 1: P2N44-334BKH0  
 2: P200T-203377S  
 3: DRAWN BY GARY  
 TEL:(02)86481727 FAX:(02)86482427