

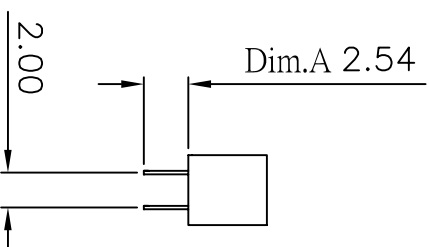
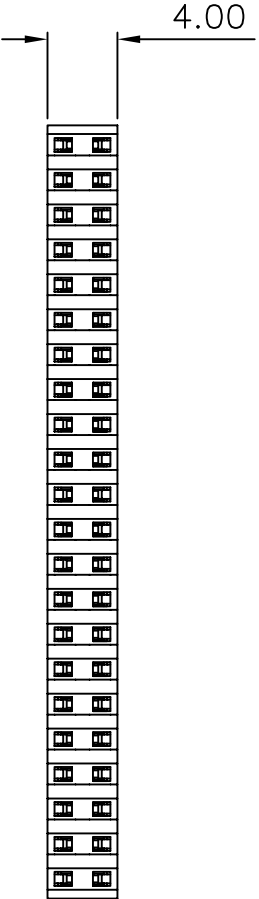
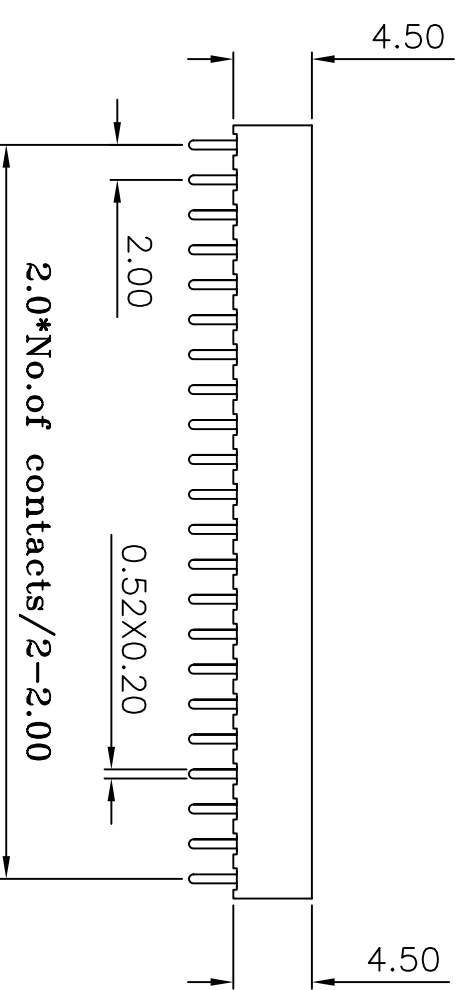



2.0*No.of contacts/2

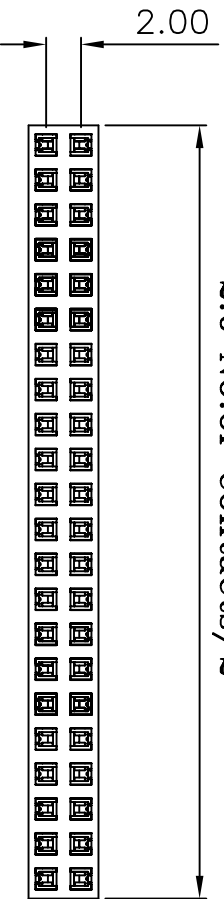

Current Rating: 2 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 500 V AC
 Operating Temperature: -40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 260° C for 10 seconds
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester, UL 94V-0
 Standard:Nylon-6T
 Finish: Tin,Gold Plated
 Standard:Gold Flash all over

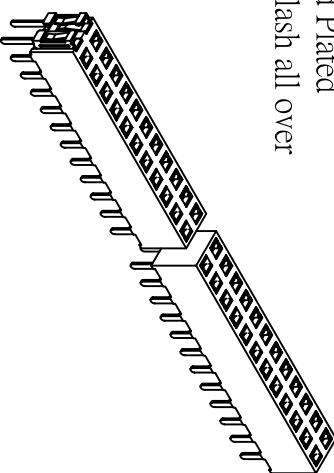

Recommended P.C. Board
 Hole Layout

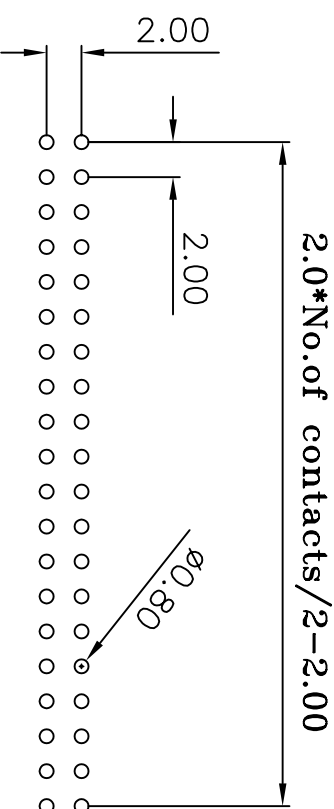

(RoHS Compliant)
 P2 N 45 - 2 XX S0 BK X 000 X
 1 2 3 4 5 6 7

- Standard:
 N= Nylon-6T
 2. Per ROW : 02~40 pin
 3. Tcoll Style:
 S0= Straight
 4. Color: BK=Black
- Contact Plated:
 T=Matte Tin over Nickel
 W=Matte Tin over Nickel 150u"
 Y=Bright Tin over Nickel
 C=Gold Flash
 F=Gold Flash,Matte Tin 100u"
 A=Gold 3u"
 B=Gold 3u",Matte Tin 100u"
- Special Options
 D=Gold 5u"
 E=Gold 5u",Matte Tin 100u"
 G=Gold 10u"
 J=Gold 10u",Matte Tin 100u"
 L=Gold 15u"
 M=Gold 15u",Matte Tin 100u"
 U=Gold 30u"
 V=Gold 30u",Matte Tin 100u"
- Packing:
 B=Tube
 C=Troy



CONN TOP
 COMPONENT INC.

①: P2N45-2XXBKH0-2007/03/28-C	PART NO	P2N45-2XXS0BKX000X	.X	.XX	.XXX
1: P2N45-2XXBKH0	DRAWING NO	P20045-00020	±0.3	±0.20	±0.100
2: P2N45T-203833S	DRAWN BY	GARY	2009/02/18	EDITION: C1	ITEM: P20045
3: 0	APPROVAL BY			SCALE: 1:1	UNIT: m.m

TEL:(02)86481727 FAX:(02)86482427