

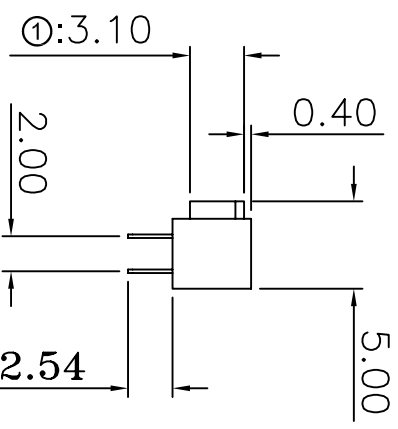


2.0 * No.of contacts/2

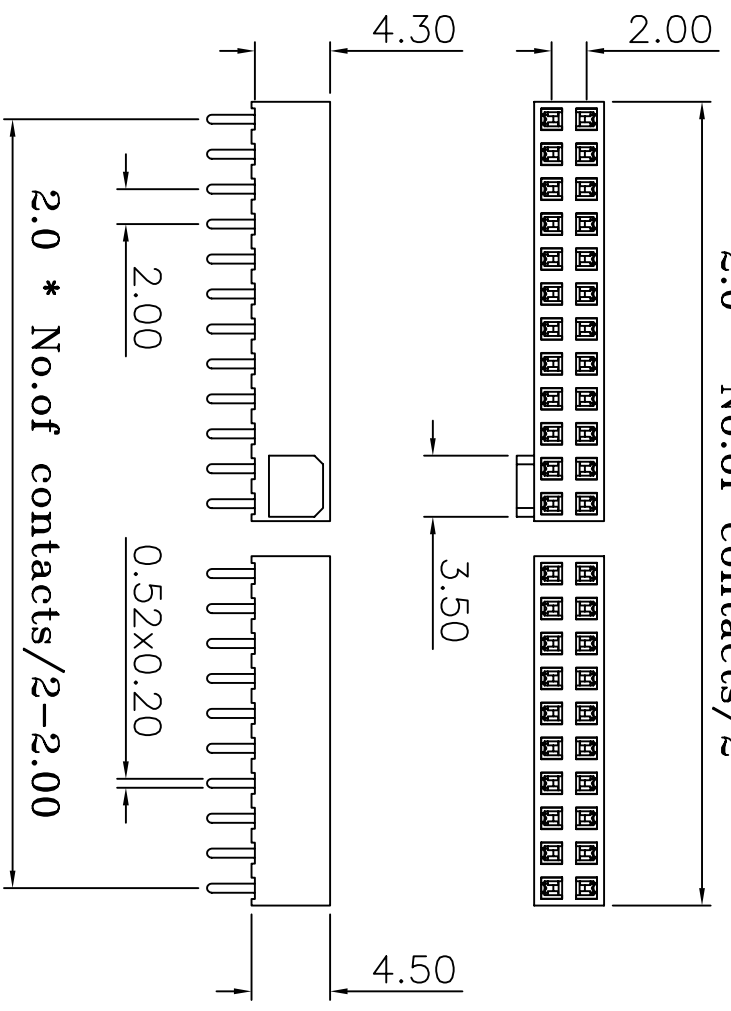


Dim.A 2.54

Current Rating: 2 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 500 V AC
 Operating Temperature: -40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 260° C for 10 seconds
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester, UL 94V-0
 Standard: Nylon-6T
 Finish: Tin, Gold Plated
 Standard: Gold Flash all over

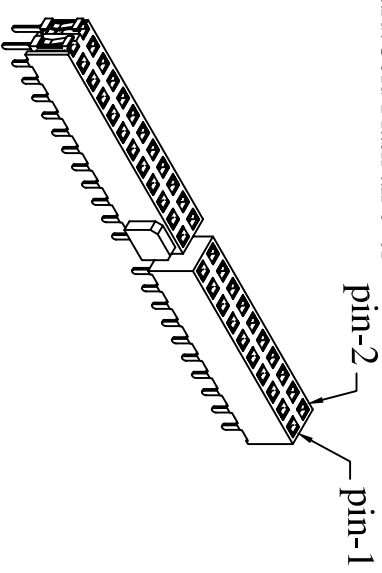

Recommended P.C. Board
 Hole Layout

2.0 * NO.of contacts/2-2.00

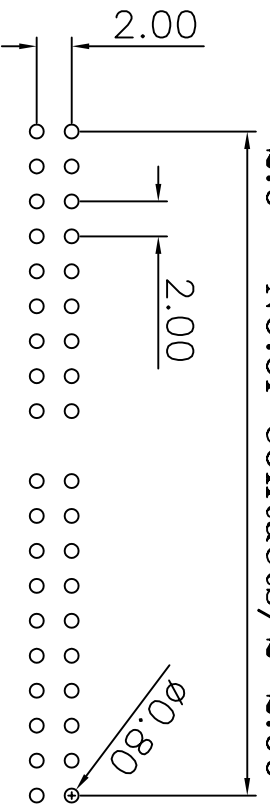

(RoHS Compliant)
P2 N 45 P - 2 XX S0 BK X 000 X
 1 2 3 4 5 6 7 8

- Standard: Nylon-6T
- P=With Key 3.10mm
- Per ROW: 03 to 40 pin
- Taill Style:
S0= Straight
- Color: BK=Black
WH=White
- Contact Plated:
T=Matte Tin over Nickel
W=Matte Tin over Nickel 150u"
Y=Bright Tin over Nickel
C=Gold Flash
F=Gold Flash,Matte Tin 100u"
A=Gold 3u"
B=Gold 3u",Matte Tin 100u"
- Special Options
D=Gold 5u"
E=Gold 5u",Matte Tin 100u"
G=Gold 10u"
J=Gold 10u",Matte Tin 100u"
L=Gold 15u"
M=Gold 15u",Matte Tin 100u"
U=Gold 30u"
V=Gold 30u",Matte Tin 100u"
- Packging:
B= Tube
C= Tray



①:3.30-2007/04/03-C
 @P2N45P-2XXS0BKX000-2008/01/10-C1
 1: P2N45P-2XXS0BKX000
 2: P2N45T-203833S
 3: 0
 TEL: (02)86481727 FAX: (02)86482427

PART NO	P2N45P-2XXS0BKX000X	.X	.XX	.XXX
DRAWING NO	P20045-00030	±0.3	±0.20	±0.100
DRAWN BY	GARY	EDITION: C2	SCALE: 1:1	ITEM: P20045
APPROVAL BY				UNIT: m.m