

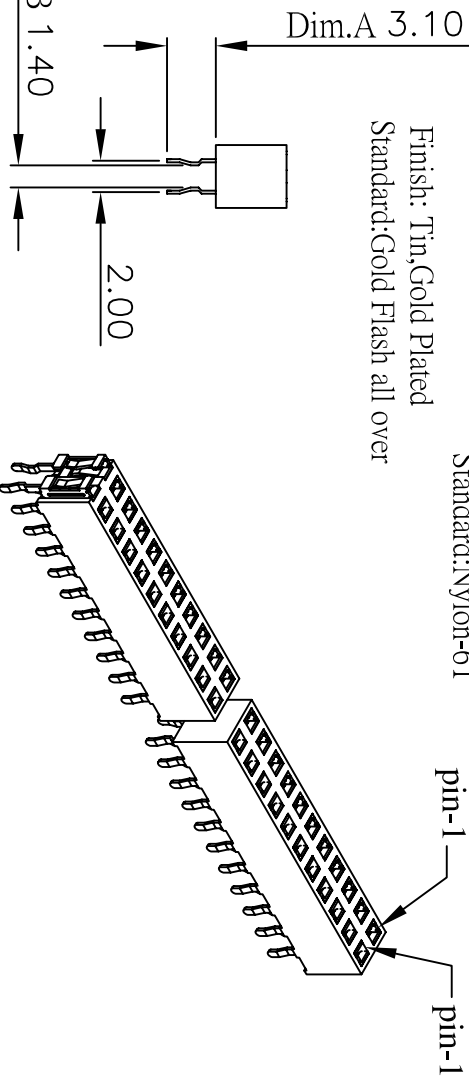


2.0\*No.of contacts/2

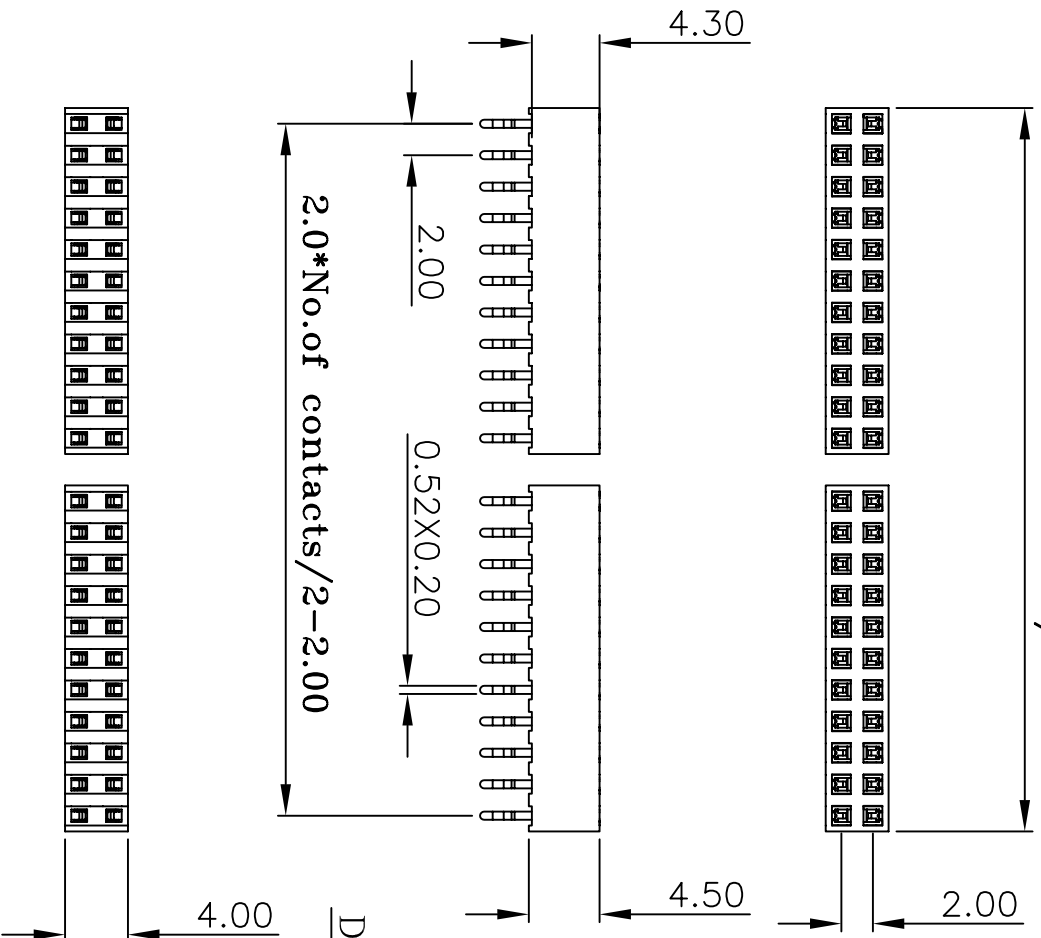

Current Rating: 2 Amps  
 Insulator Resistance: 5000 Megohms min  
 Contact Resistance: 20 m ohms max  
 Dielectric Withstanding: 500 V AC  
 Operating Temperature: -40° ~ +105° C  
 Max Processing Temp: 230° C for 60 seconds  
 260° C for 10 seconds  
 Contact Material: Phosphor Bronze  
 Insulator Material: Polyester; UL 94V-0  
 Standard: Nylon-6T  
 Finish: Tin, Gold Plated  
 Standard: Gold Flash all over

Recommended P.C. Board Hole Layout

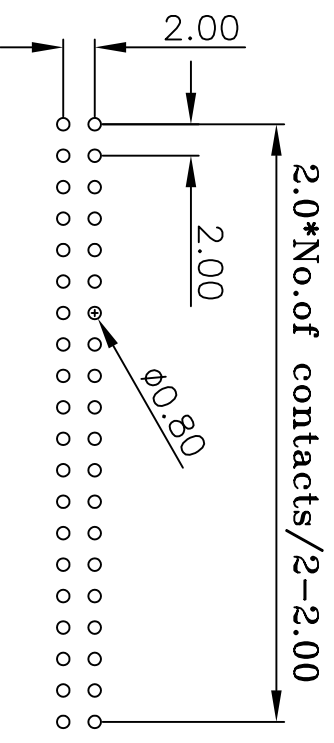

(RoHS Compliant) P2 N 45 - 2 XX SK BK X 000 X  
 1 2 3 4 5 6 7

- Standard: Nylon-6T
- Per ROW : 02~40 pin
- Taill Style: Straight W/Kink
- Color: BK=Black
- Contact Plated: T=Matte Tin over Nickel, W=Matte Tin over Nickel, Y=Bright Tin over Nickel, C=Gold Flash, F=Gold Flash, Matte Tin 100u", A=Gold 3u", B=Gold 3u", Matte Tin 100u"
- Special Options: D=Gold 5u", E=Gold 5u", Matte Tin 100u", G=Gold 10u", Matte Tin 100u", J=Gold 10u", Matte Tin 100u", L=Gold 15u", M=Gold 15u", Matte Tin 100u", U=Gold 30u", V=Gold 30u", Matte Tin 100u"
- Packaging: B=Tube, C=Tray

CONN TOP COMPONENT INC.		PART NO P2N45-2XXSKBKX000X		X	.XX	.XXX
P2N45-2XXSKBKX000X		DRAWING NO P20045-00007		±0.3	±0.20	±0.100
BOM 1: P2N45-2XXSKBKX000X		DRAWN BY GARY		EDITION: C1	ITEM: P20045	SCALE: 1:1
BOM 2: P2N45T-203838K		APPROVAL BY				UNIT: m.m
BOM 3: 0		TEL:(02)86481727 FAX:(02)86482427				