

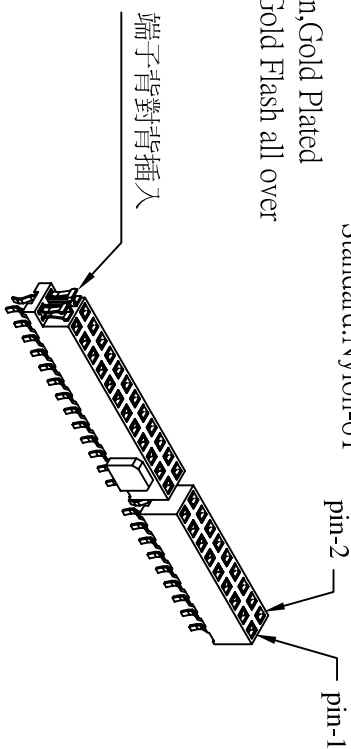


Current Rating: 2 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 500 V AC
 Operating Temperature: -40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 260° C for 10 seconds
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester, UL 94V-0
 Standard: Nylon-6T
 Finish: Tin, Gold Plated
 Standard: Gold Flash all over

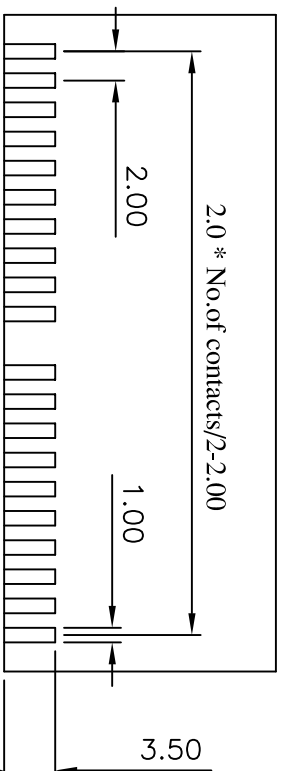

Recommended P.C. Board
 Hole Layout

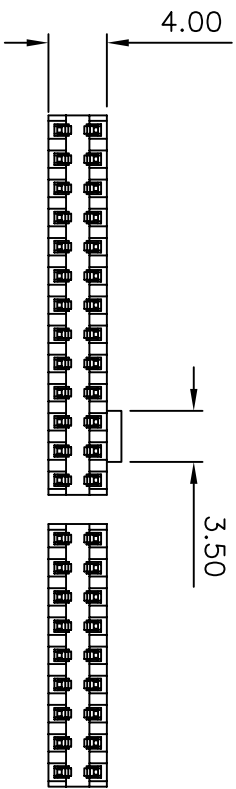

(RoHS Compliant)
 P2 N 46 P - 2 XX SK BK X 001 X
 1 2 3 4 5 6 7 8

- Standard: Nylon-6T
- P=With Key 3.10mm
- Per ROW: 03 to 40 pin
- Taill Style:
SK= Straight W/Kink
Color: BK=Black
WH=White
- Standard: Nylon-6T
- Contact Plated:
T=Matte Tin over Nickel
W=Matte Tin over Nickel 150u"
Y=Bright Tin over Nickel
C=Gold Flash
F=Gold Flash,Matte Tin 100u"
A=Gold 3u"
B=Gold 3u",Matte Tin 100u"
- Special Options
D=Gold 5u"
E=Gold 5u",Matte Tin 100u"
G=Gold 10u"
J=Gold 10u",Matte Tin 100u"
L=Gold 15u"
M=Gold 15u",Matte Tin 100u"
U=Gold 30u"
V=Gold 30u",Matte Tin 100u"
- Packging:
B= Tube
C= Tray



CONN TOP
 COMPONENT INC.

①:P2N46P-2XXXBKXH0-2009/02/26-C3
 ②:P2N46P-2XXXSKBKX001-2007/06/07-C2
 ③:P2N46P-2XXXK0BKX001-2007/03/21-C1

1:	③:P2N46P-2XXXBKXH01	PART NO	P2N46P-2XXXSKBKX001X	.X	.XX	.XXX
2:	P200T-203828S	DRAWING NO	P20045-00026	±0.3	±0.20	±0.100
3:		DRAWN BY	LIN	EDITION: C4	SCALE: 1:1	ITEM: P20045
TEL:(02)86481727 FAX:(02)86482427			APPROVAL BY			UNIT: m.m