



Current Rating: 2 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 500 V AC
 Operating Temperature: -40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 260° C for 10 seconds
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester, UL 94V-0
 Standard: Nylon-6T

Finish: Tin, Gold Plated
 Standard: Gold Flash all over

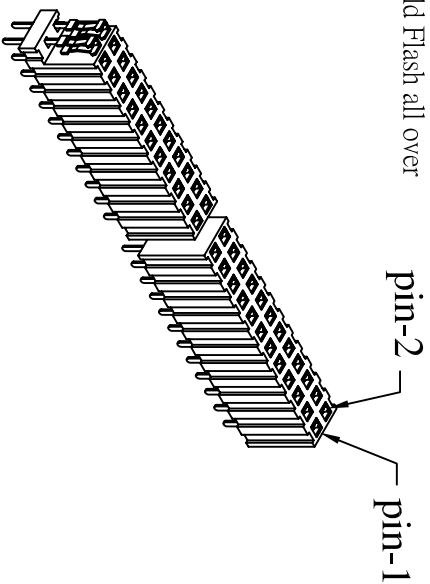

Recommended P.C. Board
 Hole Layout

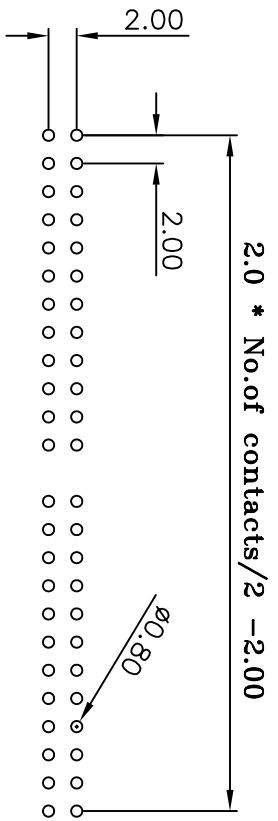

(RoHS Compliant)
 P2 N 48 - 2 XX S0 BK X 000 C
 $\frac{1}{2} \frac{3}{4} \frac{5}{6} \frac{7}{7}$

- Standard: N= Nylon-6T
- Per ROW : 02 to 40
- Tall Style: S0= Straight
Color: BK=Black
WH=White
- Contact Plated:
T=Matte Tin over Nickel
W=Matte Tin over Nickel
Y=Bright Tin over Nickel
C=Gold Flash
F=Gold Flash, Matte Tin 100u"
A=Gold 3u"
B=Gold 3u", Matte Tin 100u"
D=Gold 5u"
- E=Gold 5u", Matte Tin 100u"
G=Gold 10u"
J=Gold 10u", Matte Tin 100u"
L=Gold 15u"
M=Gold 15u", Matte Tin 100u"
U=Gold 30u"
V=Gold 30u", Matte Tin 100u"
- Special Options
Packing: C= Tray

CONN TOP COMPONENT INC.		P200-00038		X ±0.3		XX ±0.20		XXX ±0.100	
DRAWING NO		P200-00038		EDITION: C2		ITEM: P200		SCALE: 1:1	
DRAWN BY		GARY		2008/12/03		SCALE: 1:1		UNIT: m.m	
APPROVAL BY									

TEL: (02)86481727 FAX: (02)86482427