



Current Rating:
 Insulator Resistance:
 Dielectric Withstanding:
 Contact Resistance:
 Operating Temperature:
 Max Processing Temp:
 Max Processing Temp:
 Contact Material:
 Insulator Material:

1 Amps
 5000 Megohms min
 500 V AC
 20 Mhm ohms max
 -40° ~ +125° C
 230° C for 60 seconds
 260° C for 10 seconds
 Copper Alloy
 Polyester, UL 94V-0
 Standard: LCP

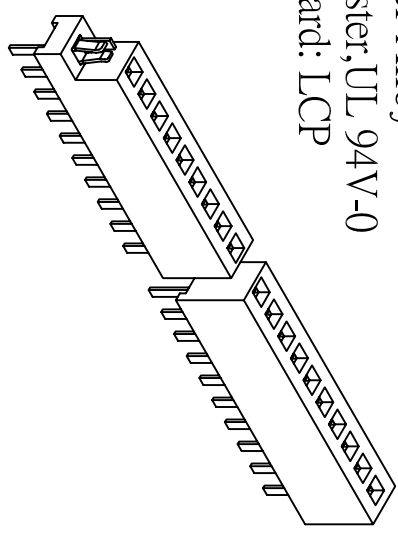

Recommended
 P.C. Board Layout

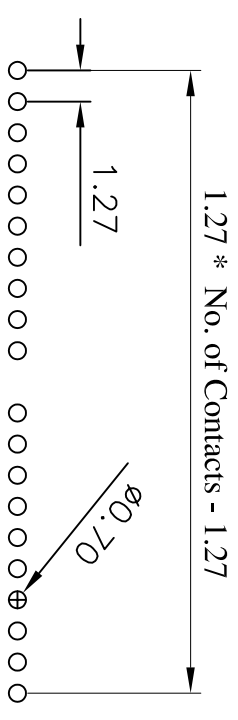

(RoHS Compliant)
 (Halogen-Free)

P3 L 34 - 1 XX S0 BK X 303 X
 1 2 3 4 5 6 7

- Standard: L=LCP
- Per ROW 02 to 50
- Toill Style: S0= Straight
- Color: BK=Black
- Contact Plated: C=Gold Flash
- Contact Style: A=Gold 3u"
- Special Options: D=Gold 5u", G=Gold 10u", L=Gold 15u", U=Gold 30u", B= Tube, C= Tray



①:P3L34T-1525-01S-20-2007/10/25-C
 ②:P3L34-1XXS0BKX203-2007/10/25-C
 ③:P3L34-1XXS0BKX203-2007/10/25-C

PART NO	P3L34-1XXS0BKX303X	.X	.XX	.XXX
DRAWING NO	P127-00085	±0.3	±0.20	±0.100
DRAWN BY	LIN	EDITION: C1	ITEM: P127	SCALE: 1:1
APPROVAL BY				UNIT: m.m

TEL:(02)86481727 FAX:(02)86482427