



Current Rating: 1 Amps
Insulator Resistance: 5000 Megohms min
Dielectric Withstanding: 500 V AC
Contact Resistance: 20 Mm ohms max
Operating Temperature: -40° ~ +125° C
Max Processing Temp: 230° C for 60 seconds
Max Processing Temp: 260° C for 10 seconds
Contact Material: Copper Alloy
Insulator Material: Polyester, UL 94V-0
Standard: LCP

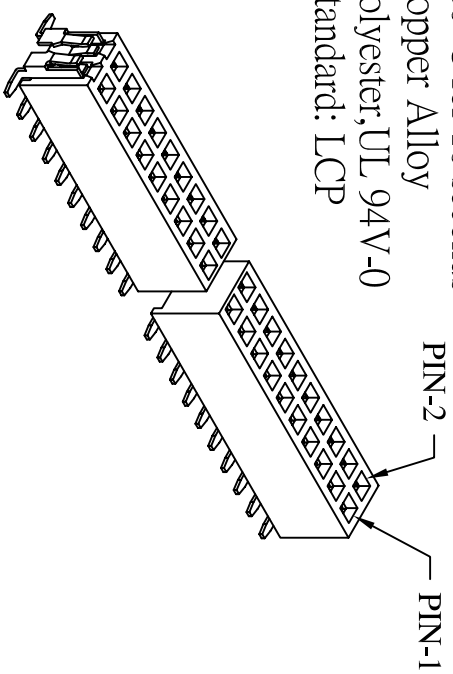

Recommended
 P.C. Board Layout

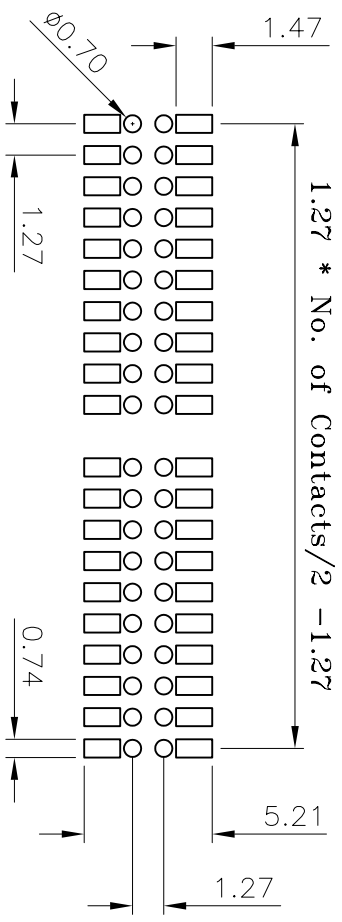


(RoHS Compliant)
 (Halogen-Free)

P3 L 34 - 2 XX D0 BK X 000 B
 1 2 3 4 5 6 7

- Standard: L=LCP
- Per ROW 02 to 50
- Tail Style: DO= S.M.D No Peg Type
- Color: BK=Black
- Contact Plated: C=Gold Flash
- Special Options: D=Gold 5u", G=Gold 10u", L=Gold 15u", U=Gold 30u"
- Packing: B= Tube

CONN TOP COMPONENT INC.		PART NO	P3L34-2XXD0BKX000B	.X	±0.3	.XX	±0.20	.XXX	±0.100
BOM 1: P3L34-2XXBK0 2: P3L34T-1525-01D 3: W055		DRAWING NO	P127-00005	EDITION:	C2	ITEM:	P127	SCALE:	1:1
TEL: (02)86481727 FAX: (02)86482427		DRAWN BY	GARY	2009/10/08		UNIT:	m.m		

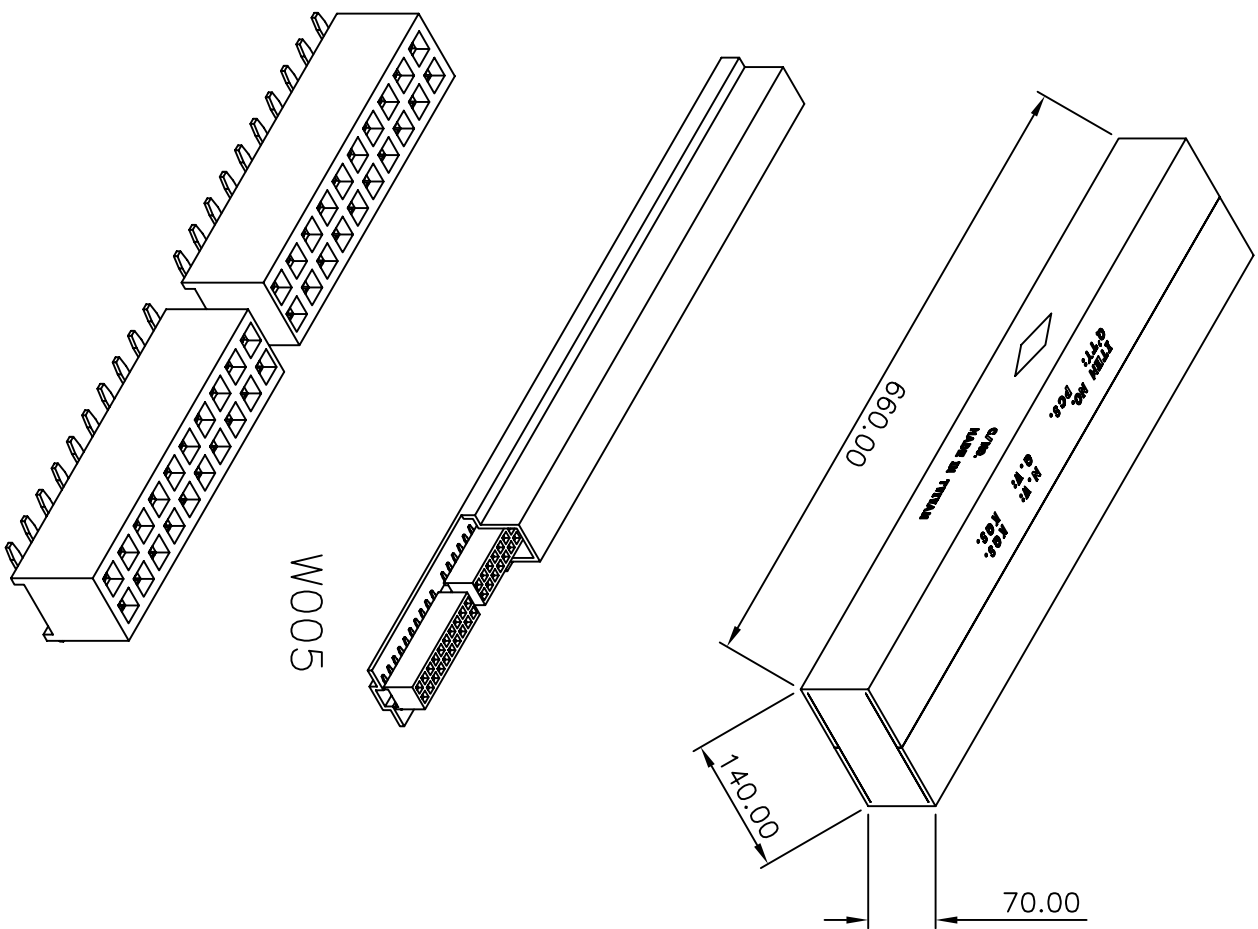

P3N34-2XXD0BKX000B

PART NO	DIMENSIONS		
	PCS/Tube	Tube/Carton	Carton
P3L34-202D0BKX000B	200.00	100	20000
P3L34-203D0BKX000B	142.00	100	14200
P3L34-204D0BKX000B	110.00	100	11000
P3L34-205D0BKX000B	90.00	100	9000
P3L34-206D0BKX000B	75.00	100	7500
P3L34-207D0BKX000B	65.00	100	6500
P3L34-208D0BKX000B	58.00	100	5800
P3L34-209D0BKX000B	51.00	100	5100
P3L34-210D0BKX000B	46.00	100	4600
P3L34-211D0BKX000B	42.00	100	4200
P3L34-212D0BKX000B	39.00	100	3900
P3L34-213D0BKX000B	36.00	100	3600
P3L34-214D0BKX000B	33.00	100	3300
P3L34-215D0BKX000B	31.00	100	3100
P3L34-216D0BKX000B	29.00	100	2900
P3L34-217D0BKX000B	28.00	100	2800
P3L34-218D0BKX000B	26.00	100	2600
P3L34-219D0BKX000B	25.00	100	2500
P3L34-220D0BKX000B	23.00	100	2300
P3L34-221D0BKX000B	22.00	100	2200
P3L34-222D0BKX000B	21.00	100	2100
P3L34-223D0BKX000B	20.00	100	2000
P3L34-224D0BKX000B	20.00	100	2000
P3L34-225D0BKX000B	19.00	100	1900
P3L34-226D0BKX000B	18.00	100	1800
P3L34-227D0BKX000B	17.00	100	1700
P3L34-228D0BKX000B	17.00	100	1700
P3L34-229D0BKX000B	16.00	100	1600
P3L34-230D0BKX000B	16.00	100	1600
P3L34-231D0BKX000B	15.00	100	1500
P3L34-232D0BKX000B	15.00	100	1500
P3L34-233D0BKX000B	14.00	100	1400
P3L34-234D0BKX000B	14.00	100	1400
P3L34-235D0BKX000B	13.00	100	1300
P3L34-236D0BKX000B	13.00	100	1300
P3L34-237D0BKX000B	13.00	100	1300
P3L34-238D0BKX000B	12.00	100	1200
P3L34-239D0BKX000B	12.00	100	1200
P3L34-240D0BKX000B	12.00	100	1200
P3L34-241D0BKX000B	11.00	100	1100
P3L34-242D0BKX000B	11.00	100	1100
P3L34-243D0BKX000B	11.00	100	1100
P3L34-244D0BKX000B	10.00	100	1000
P3L34-245D0BKX000B	10.00	100	1000
P3L34-246D0BKX000B	10.00	100	1000
P3L34-247D0BKX000B	10.00	100	1000
P3L34-248D0BKX000B	10.00	100	1000
P3L34-249D0BKX000B	9.00	100	900
P3L34-250D0BKX000B	9.00	100	900

		CONN TOP COMPONENT INC.	
1:	033-紙箱	PART NO	P3L34-2XXD0BKX000B (Tube)
2:	W005	DRAWING NO	BOX-00019
3:		DRAWN BY	GARY
		EDITION:	C
		SCALE:	1:1
		UNIT:	mm
		APPROVAL BY	
TEL: (02)86481727 FAX: (02)86482427			