

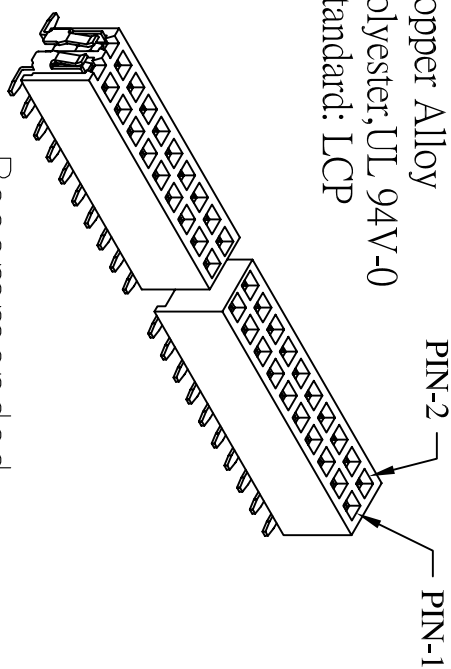


**Current Rating:** 1 Amps  
**Insulator Resistance:** 5000 Megohms min  
**Dielectric Withstanding:** 500 V AC  
**Contact Resistance:** 20 Mm ohms max  
**Operating Temperature:** -40° ~ +125° C  
**Max Processing Temp:** 230° C for 60 seconds  
**Max Processing Temp:** 260° C for 10 seconds  
**Contact Material:** Copper Alloy  
**Insulator Material:** Polyester, UL 94V-0  
**Standard:** LCP

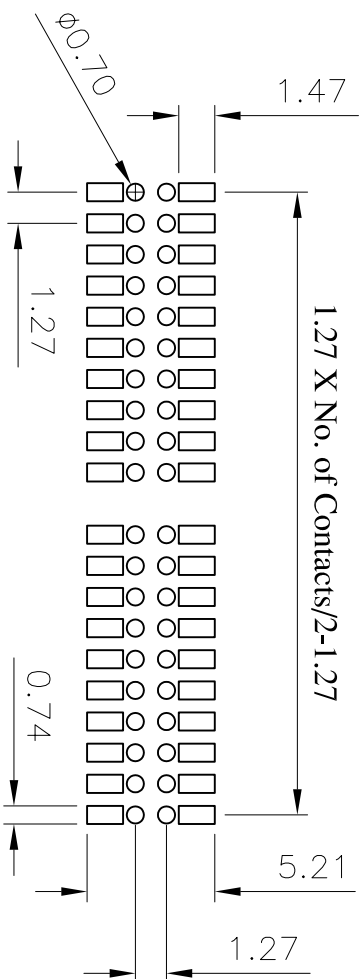

Recommended  
P.C. Board Layout

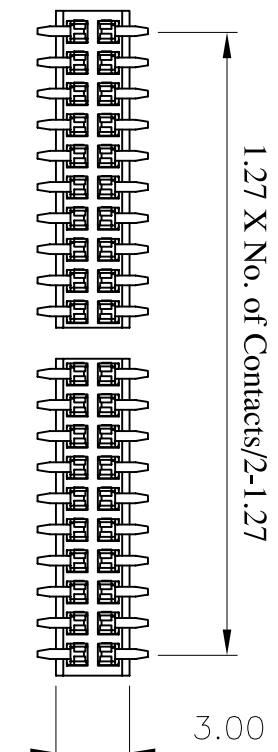

(RoHS Compliant)  
(Halogen-Free)

P3 L 34 - 2 XX D0 BK X 200 B  
1 2 3 4 5 6 7

- Standard: L=LCP
- Per ROW 02 to 50
- Taill Style: D0 = S.M.D No Peg Type
- Color: BK=Black
- Contact Plated: O=Gold Flash
- Special Options: D=Gold 5u", G=Gold 10u", L=Gold 15u", U=Gold 30u", B= Tube
- Packaging: B= Tube



CONN TOP  
COMPONENT INC.

PART NO

P3L34-2XXD0BKX200B

X .X  
±0.3 ±0.20  
XXX ±0.100

①: P3L34-2XXBKX200-2007/1/23-C1

BOM 2: P3L34T-1525-01D-20

3: W055

DRAWING NO

P127-00034

EDITION: C2

ITEM: P127

DRAWN BY

GARY

2009/10/08

SCALE: 1:1

TEL: (02)86481727 FAX: (02)86482427

APPROVAL BY

UNIT: m.m