

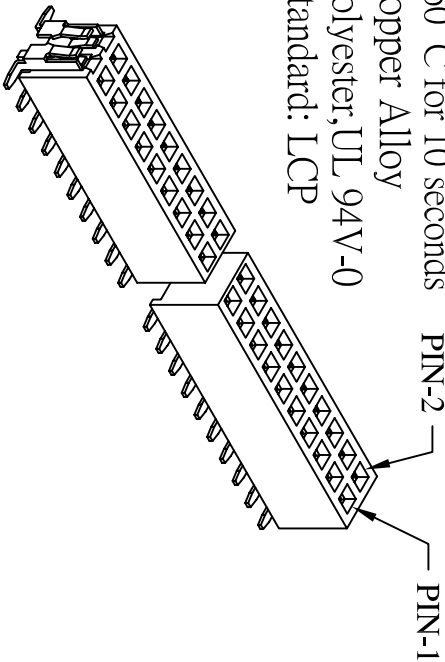


Current Rating: 1 Amps
Insulator Resistance: 5000 Megohms min
Dielectric Withstanding: 500 V AC
Contact Resistance: 20 Mm ohms max
Operating Temperature: -40° ~ +125° C
Max Processing Temp: 230° C for 60 seconds
Max Processing Temp: 260° C for 10 seconds
Contact Material: Copper Alloy
Insulator Material: Polyester, UL 94V-0
Standard: LCP

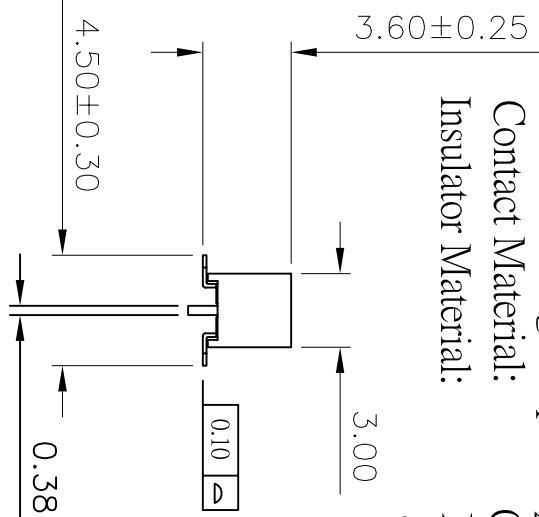

Recommended
 P.C. Board Layout

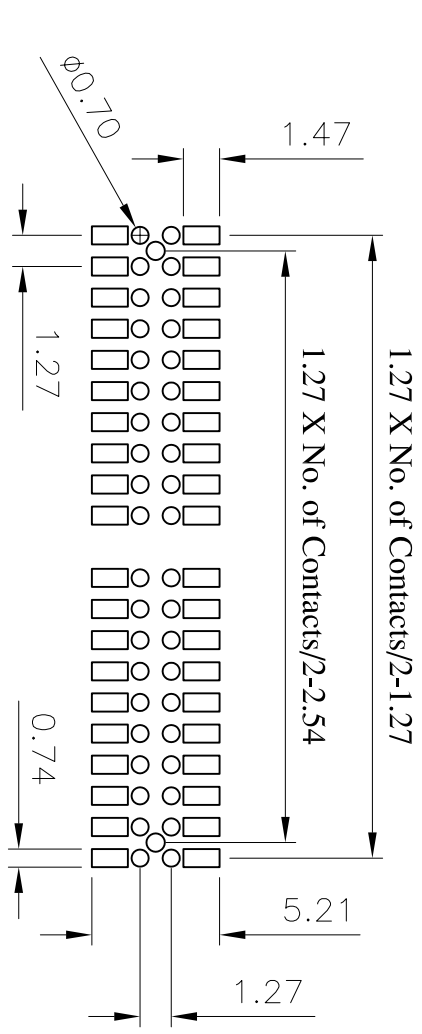

(RoHS Compliant)
 (Halogen-Free)
 P3 L 34 - 2 XX D1 BK X 000 B
 1 2 3 4 5 6 7

- Standard: L=LCP
- Per ROW 02 to 50
- Taill Style: D1 = S.M.D With Peg Type
- Color: BK=Black
- Contact Plated: O=Gold Flash A=Gold 3u"
- Special Options: D=Gold 5u", G=Gold 10u", L=Gold 15u", U=Gold 30u"
- Packaging: B= Tube

		P3L34-2XXD1BKX000-2007/03/22-C	
1:	P3L34-2XXBKHI	PART NO	P3L34-2XXD1BKX000B
2:	P3L34T-1525-01D	DRAWING NO	P127-00006
3:	W055	DRAWN BY	LIN
TEL: (02)86481727 FAX: (02)86482427		EDITION:	C1
		SCALE:	1:1
		APPROVAL BY	
		ITEM:	P127
		SCALE:	1:1
		UNIT:	m.m