



Current Rating: 1 Amps
 Insulator Resistance: 5000 Megohms min
 Dielectric Withstanding: 500 V AC
 Contact Resistance: 20 Mm ohms max
 Operating Temperature: -40° ~ +125° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Copper Alloy
 Insulator Material: Polyester, UL 94V-0
 Standard: LCP

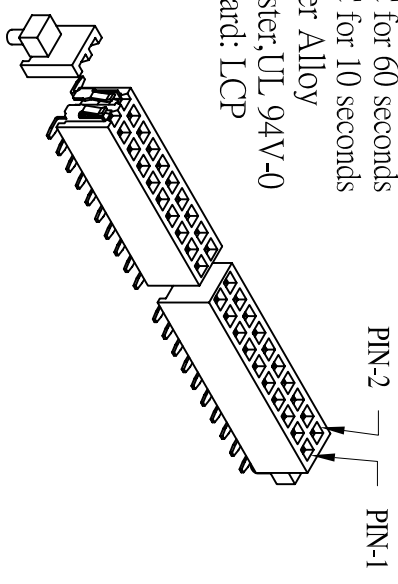

Recommended
 P.C. Board Layout

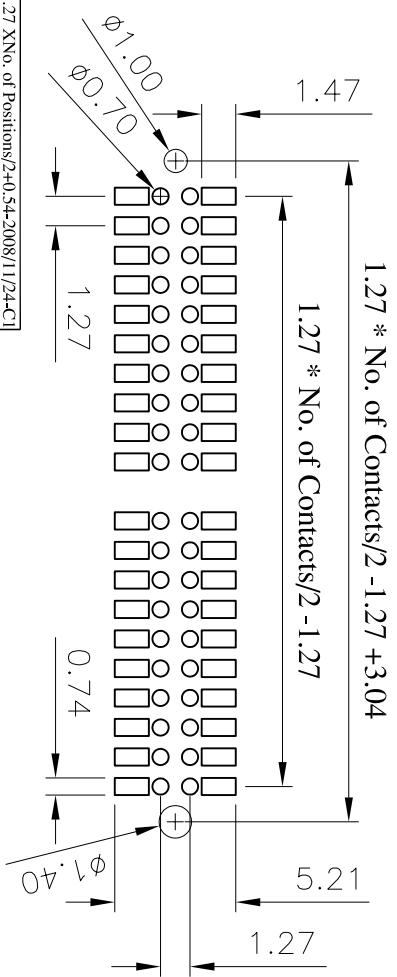

(RoHS Compliant)
 (Halogen-Free)
 P3 L 34 - 2 XX D2 BK X 200 B
 1 2 3 4 5 6 7

- Standard: L=LCP
- Per ROW 02 to 50
- Tail Style: D2=With Peg
- Color: BK=Black
- Contact Plated: C=Gold Flash
- Special Options: D=Gold 5u", G=Gold 10u", L=Gold 15u", U=Gold 30u"
- Packing: B= Tube

CONN TOP COMPONENT INC. 		PART NO		P3L34-2XXD2BKX200B		.X		.XX		.XXX	
1: P3L34-XXBKHX2 2: P3L34T-1525-01D-20 3: W005		DRAWING NO		P127-00087		±0.3		±0.20		±0.100	
TEL: (02)86481727 FAX: (02)86482427		DRAWN BY		GARY		EDITION: C2		ITEM: P127		SCALE: 1:1	
		APPROVAL BY								UNIT: m.m	