

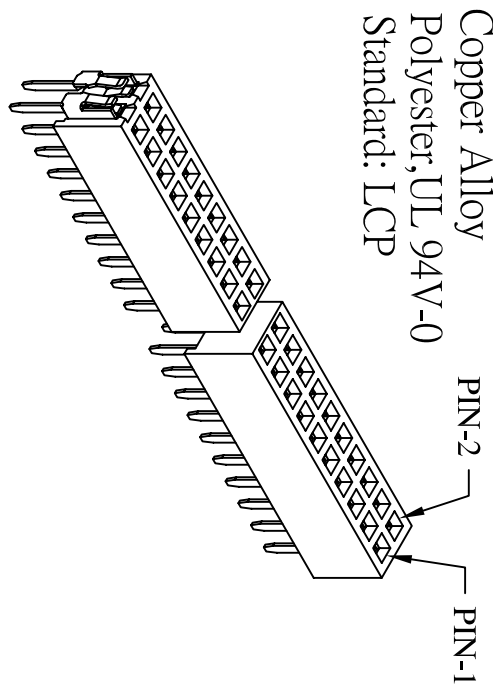


Current Rating:
 Insulator Resistance:
 Dielectric Withstanding:
 Contact Resistance:
 Operating Temperature:
 Max Processing Temp:
 Contact Material:
 Insulator Material:

1 Amps
 5000 Megohms min
 500 V AC
 20 Mm ohms max
 -40° ~ +125° C
 230° C for 60 seconds
 260° C for 10 seconds
 Copper Alloy
 Polyester, UL 94V-0
 Standard: LCP

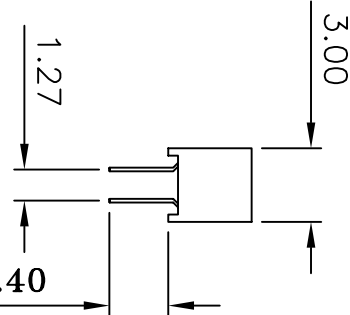

Recommended
 P.C. Board Layout

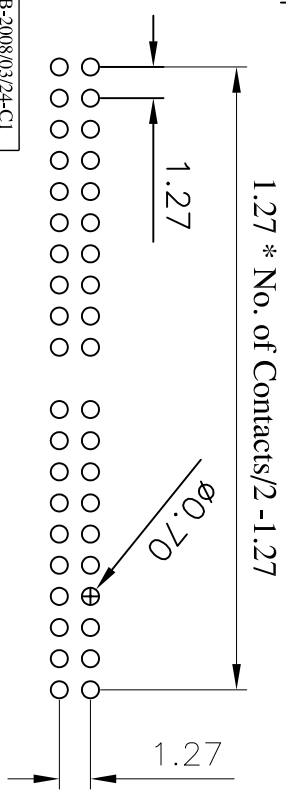

(RoHS Compliant)
 (Halogen-Free)

P3 L 34 - 2 XX S0 BK X 000 X
 1 1 2 3 4 5 6 7

- Standard: L=LCP
- Per ROW 02 to 50
- Toill Style: S0= Straight
- Color: BK=Black
- Contact Plated: C=Gold Flash
- Contact Style: A=Gold 3u"
- Special Options: D=Gold 5u", G=Gold 10u", L=Gold 15u", U=Gold 30u"
- Packing: B= Tube, C= Tray

		P3L34-2XXS0BKX000B-2008/03/24-C1 P3L34-2XXS0BKX000-2007/02/16-C	
1:	P3L34-2XXBKH0	PART NO	P3L34-2XXS0BKX000X
2:	P3L34T-1525-02S	DRAWING NO	P127-00004
3:	W055	DRAWN BY	GARY
TEL: (02)86481727 FAX: (02)86482427		APPROVAL BY	
		EDITION:	C2
		SCALE:	1:1
		ITEM:	P127
		SCALE:	1:1
		UNIT:	m.m