


(RoHS Compliant)
(Halogen-Free)


P3 L 35 - 2 XX D0 BK X 000 B
 1 2 3 4 5 6 7

- Standard: L=LCP
- Per ROW 02 to 50
- Taill Style: D0 = S.M.D No Peg Type
- Color: BK=Black
- Contact Plated: C=Gold Flash
- Special Options: D=Gold 5u", G=Gold 10u", L=Gold 15u", U=Gold 30u"
- Packing: B = Tube
- Contact A=Gold 3u"

Current Rating: 1 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 500 V AC
 Operating Temperature: -40° ~ +125° C
 Max Processing Temp: 230° C for 60 seconds
 Contact Material: 260° C for 10 seconds
 Insulator Material: Phosphor Bronze
 Finish: Tin, Gold Plated
 Standard: Gold Flash all over nickel
 Polyester, UL 94V-0
 Standard: L,C,P

Recommended P.C. Board
 SMD Layout

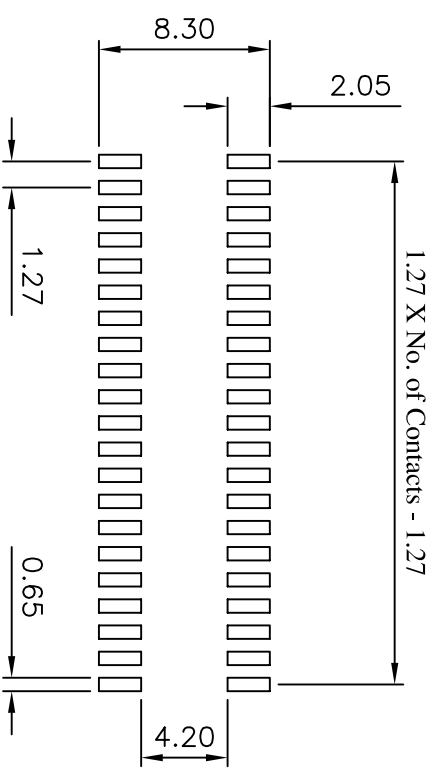

 CONN TOP COMPONENT INC.		PART NO		P3L35-2XXD0BKX000B		.X		.XXX	
I: P3L35-2XXBKHH0 BOM 2: P3X35T-1520-01D 3: P3X35T-1520-02D		DRAWING NO		P127-00176		±0.3		±0.100	
TEL: (02)86481727 FAX: (02)86482427		DRAWN BY		GARY		EDITION: C		ITEM: P127	
		APPROVAL BY				SCALE: 1:1		UNIT: m.m	