

(RoHS Compliant)
(Halogen-Free)

P3 L 35 - 2 XX D1 BK X 000 B
1 2 3 4 5 6 7

- Standard: L=LCP
- Per ROW 02 to 50
- Taill Style: D1 = S.M.D With Peg Type
- Color: BK=Black
- Contact Plated: C=Gold Flash
- Special Options: D=Gold 5u", G=Gold 10u", L=Gold 15u", U=Gold 30u"
- Packing: B= Tube

Current Rating: 1 Amps

Insulator Resistance: 5000 Megohms min

Contact Resistance: 20 m ohms max

Dielectric Withstanding: 500 V AC

Operating Temperature: -40° ~ +125° C

Max Processing Temp: 230° C for 60 seconds
260° C for 10 seconds

Contact Material: Phosphor Bronze


Insulator Material: Polyester, UL 94V-0

Standard: L,C,P

Finish: Tin, Gold Plated

Standard: Gold Flash all over nickel

Recommended P.C. Board
SMD Layout

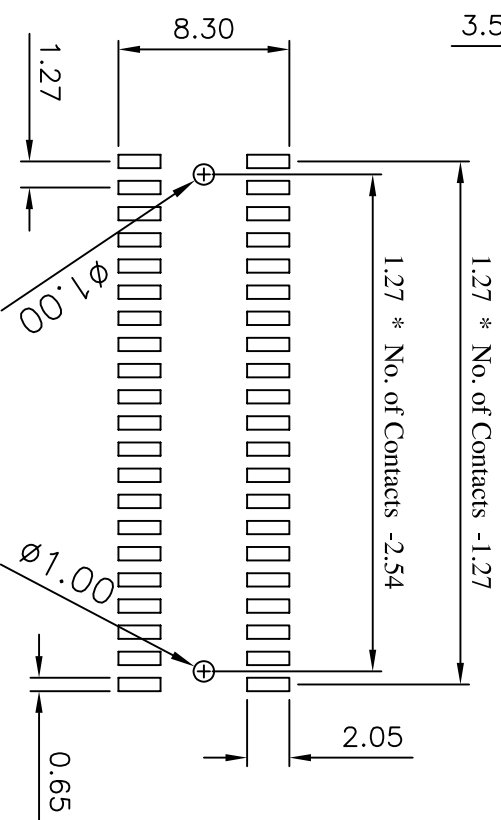

CONN TOP COMPONENT INC. TEL: (02)86481727 FAX: (02)86482427		P3LN35-2XXD1BKX000B-2008/0625-C	
1: P3L35-2XX1BKHI	PART NO	P3L35-2XXD1BKX000B	.X
2: P3X35T-1520-01D	DRAWING NO	P127-00136	±0.3
3: P3X35T-1520-02D	DRAWN BY	GARY	EDITION: C1
	APPROVAL BY		SCALE: 1:1
			ITEM: P127
			SCALE: 1:1
			UNIT: m.m