



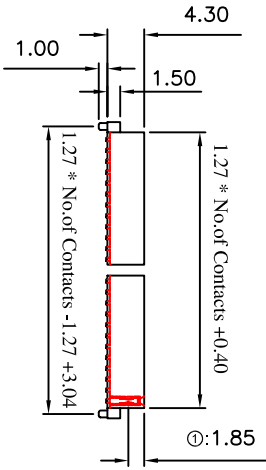
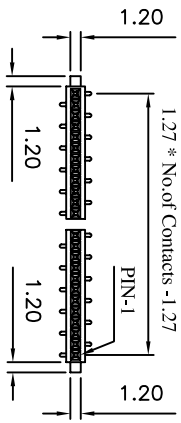




A TYPE

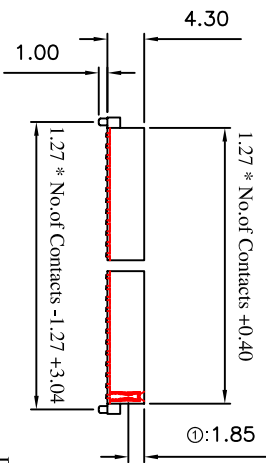

B TYPE


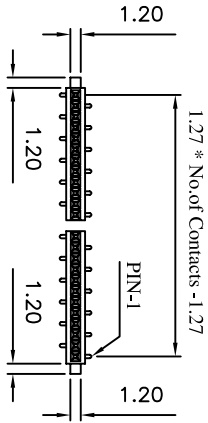


Current Rating: 1 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20m ohms max.
 Dielectric Withstanding: 500 V AC
 Operating Temperature: -40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Copper Alloy
 Insulator Material: Polyester, UL 94V-0
 Standard: LCP

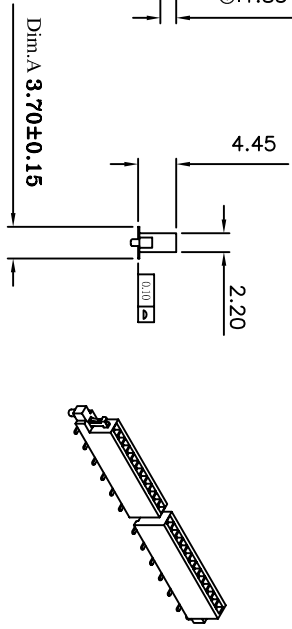


A TYPE

Recommended P.C. Board SMD Layout

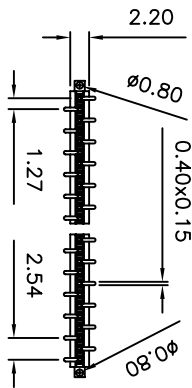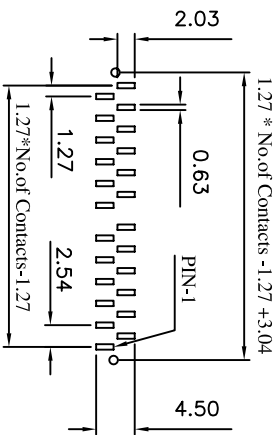

Recommended P.C. Board SMD Layout

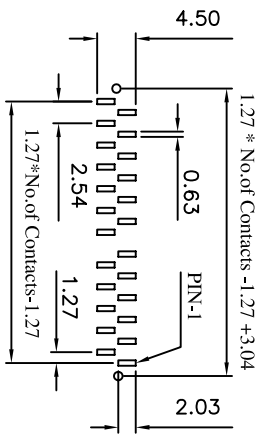

(RoHS Compliant)
(Halogen-Free)

P3 L 43 - 1 XX DX BK X 000 B
1 2 3 4 5 6 7

- Standard: L=LCP
- Per ROW 02 to 50
- Taill Style: D3= S.M.D A Type D4= S.M.D B Type
- Color: BK=Black
- Contact Plated: C=Gold Flash A=Gold 3u"
- Special Options: D=Gold 5u" G=Gold 10u" L=Gold 15u" U=Gold 30u" B= Tube
- Packings: B= Tube



P3L43T-1534-01D-2008/12/01-C
 P3L43-1XXH2
 P3L43T-1534-03D

PART NO	P3L43-1XXDXBKX000B	X	XX	XXX
DRAWING NO	P127-00155	±0.3	±0.20	±0.100
DRAWN BY	GARY	EDITION: C1	SCALE: 1:1	ITEM: P127
APPROVAL BY		2009/05/26		UNIT: m.m

TEL:(02)86481727 FAX:(02)86482427