



Current Rating: 1 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 500 V AC
 Operating Temperature: -40° ~ +125° C
 Max Processing Temp: 230° C for 60 seconds
 260° C for 10 seconds
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester, UL 94V-0
 Standard: LCP
 Finish: Tin, Gold Plated
 Standard: Gold Flash all over

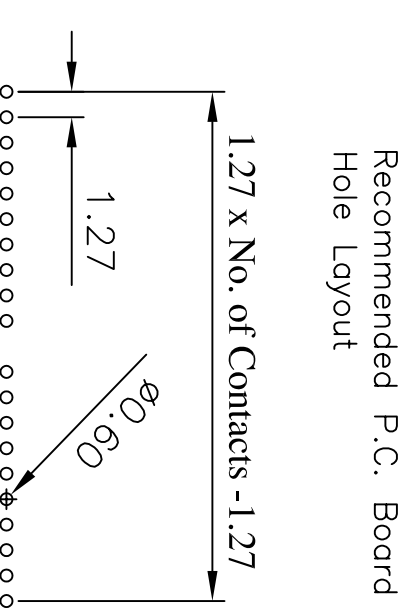

(RoHS Compliant)
 (Halogen-Free)
 P3 L 43 - 1 XX S0 BK X 000 B
 1 2 3 4 5 6 7

- Standard: L=LCP
- Per ROW 02 to 50
- Taill Style: S0= Straight
- Color: BK=Black
- Contact Plated: C=Gold Flash
- Contact Style: A=Gold 3u"
- Special Options: D=Gold 5u", G=Gold 10u", L=Gold 15u", U=Gold 30u"
- Packing: B= Tube

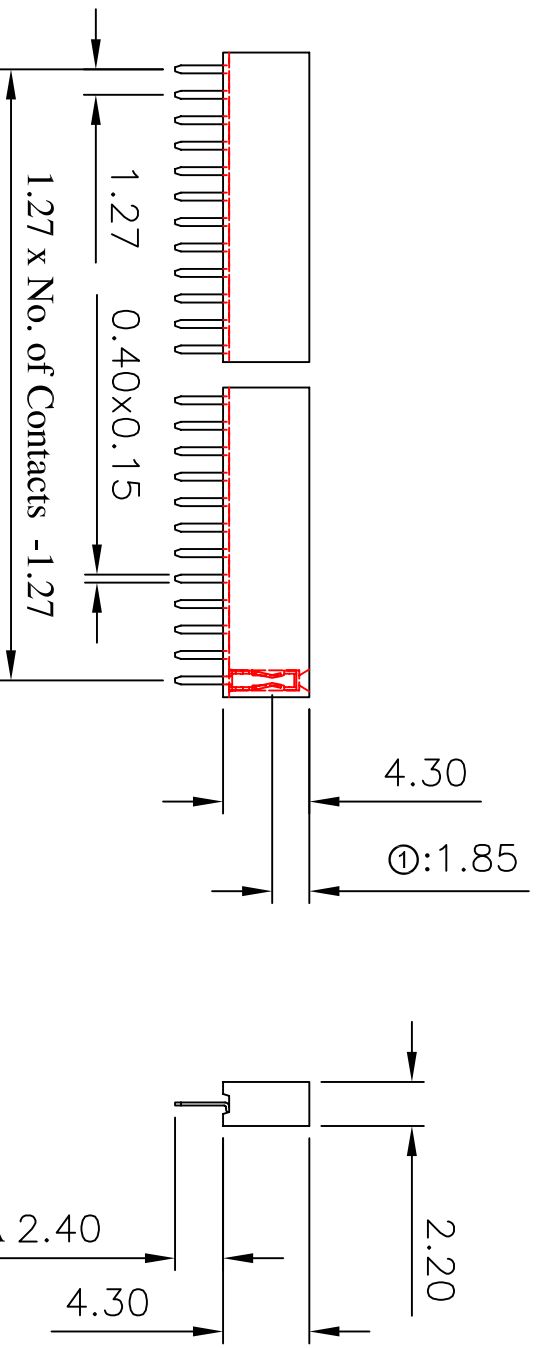

①: P3L43T-1534-01S-2008/12/01-C
 ②: 2.45-2008/12/01-C

1: P3L43-1XXXBKXH0
 2: @: P3L43T-1534-03S
 3: TEL: (02)86481727 FAX: (02)86482427

PART NO	P3L43-1XXXS0BKX000B	.X	.XX	.XXX
DRAWING NO	P127-00157	±0.3	±0.20	±0.100
DRAWN BY	GARY	EDITION: C1	ITEM: P127	SCALE: 1:1
APPROVAL BY				UNIT: m.m