

Current Rating: 1 Amps

Insulator Resistance: 5000 Megohms min

Contact Resistance: 20 m ohms max

Dielectric Withstanding: 500 V AC

Operating Temperature: -40° ~ +105° C

Max Processing Temp: 230° C for 60 seconds

260° C for 10 seconds


Contact Material: Phosphor Bronze

Insulator Material: Polyester, UL 94V-0


Standard: LCP

Finish: Tin, Gold Plated

Standard: Gold Flash all over

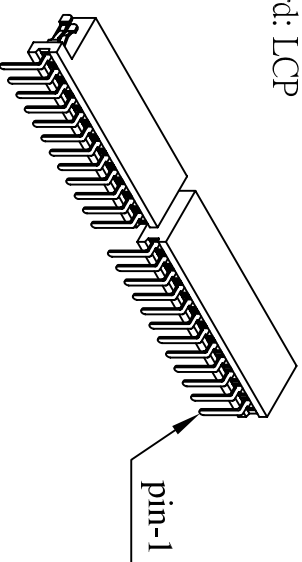

Recommended P.C. Board
Hole Layout

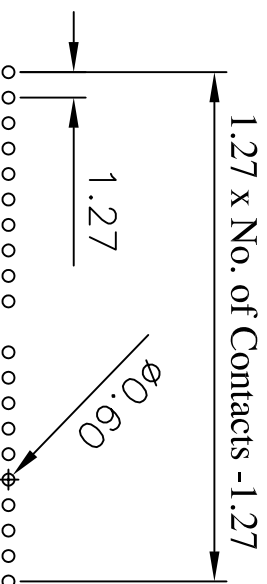

(RoHS Compliant)
(Halogen-Free)

P3 L 45 - 1 XX R0 BK X 000 B

1 2 3 4 5 6 7

- Standard: L=LCP
- Per ROW 02 to 50
- Taill Style: R0= Right Angle
- Color: BK=Black
- Contact Plated: C=Gold Flash
- Special Options: D=Gold 5u", G=Gold 10u", L=Gold 15u", U=Gold 30u"
- Packing: B= Tube



CONN TOP
COMPONENT INC.

①:P3L43T-1534-01R-2009/01/14-C
②:2.65-2009/01/14-C

1: P3L45-1XXRBKH0
2: @:P3L43T-1534-02R
3:
TEL:(02)86481727 FAX:(02)86482427

PART NO

P3L45-1XXRBKX000B

.X
±0.3

.XXX
±0.100

DRAWING NO

P127-00172

EDITION: C1

ITEM: P127

DRAWN BY

GARY

2009/05/25

SCALE: 1:1

APPROVAL BY

UNIT: m.m