



Current Rating:
 Insulator Resistance:
 Contact Resistance:
 Dielectric Withstanding:
 Operating Temperature:
 Max Processing Temp:
 Contact Material:
 Insulator Material:
 Finish: Tin, Gold Plated
 Standard: Gold Flash all over

1 Amps
 5000 Megohms min
 20 m ohms max
 500 V AC
 -40° ~ +105° C
 230° C for 60 seconds
 260° C for 10 seconds
 Phosphor Bronze
 Polyester, UL 94V-0
 Standard: LCP

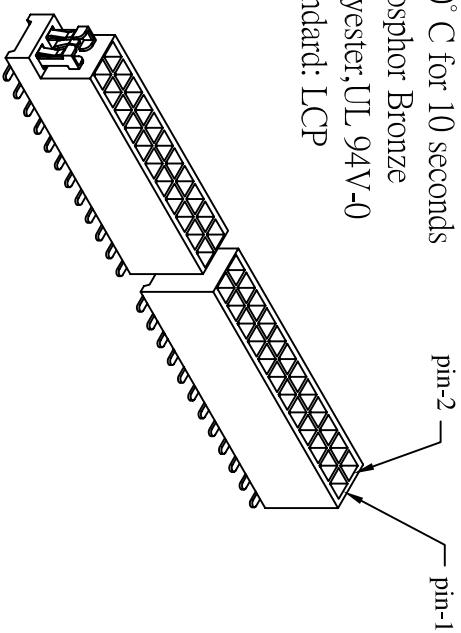

Recommended P.C. Board
 SMD Layout

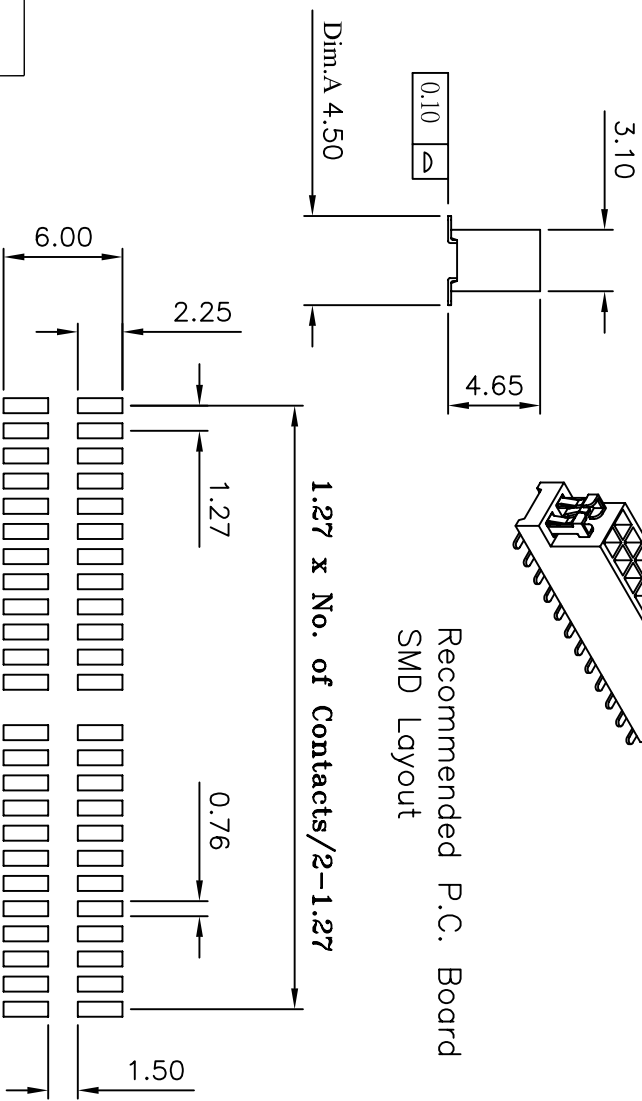

(RoHS Compliant)
 (Halogen-Free)

P3 L 45 - 2 XX D0 BK X 001 B
 1 2 3 4 5 6 7

- Standard: L=LCP
- Per ROW 02 to 50
- Taill Style:
DO=S.M.D Type
- Color:
BK=Black
- Contact Plated:
C=Gold Flash
A=Gold 3u"
- Special Options
D=Gold 5u"
G=Gold 10u"
L=Gold 15u"
U=Gold 30u"
- Packing:
B= Tube



CONN TOP
 COMPONENT INC.

PART NO

P3L45-2XXDBKX001B

X .X
 ±0.3

1: P3L45-2XXBKHO

DRAWING NO

P127-00173

.XXX
 ±0.20

2: @:P3L43T-1534-04D

DRAWN BY

GARY

ITEM: P127

3:

APPROVAL BY

2009/05/25

SCALE: 1:1

TEL: (02)86481727 FAX: (02)86482427

UNIT: m.m