



Current Rating: 1 Amps  
 Insulator Resistance: 5000 Megohms min  
 Contact Resistance: 20 m ohms max  
 Dielectric Withstanding: 500 V AC  
 Operating Temperature: -40° ~ +105° C  
 Max Processing Temp: 230° C for 60 seconds  
 260° C for 10 seconds

Phosphor Bronze  
 Insulator Material: Polyester, UL 94V-0  
 Contact Material: Phosphor Bronze  
 Finish: Tin, Gold Plated  
 Standard: LCP

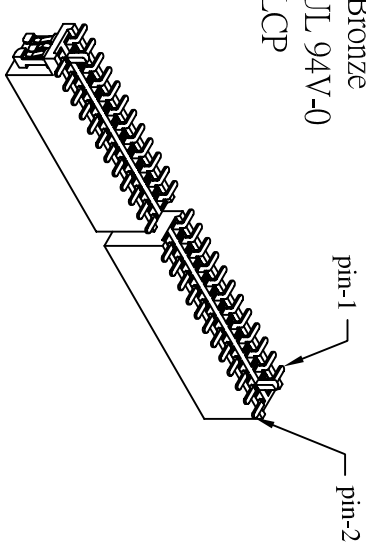

Recommended P.C. Board  
 SMD Layout

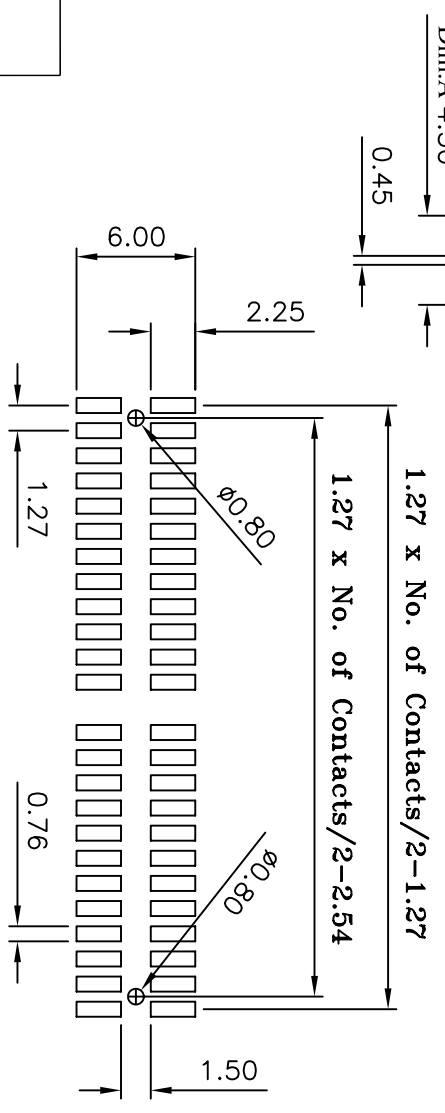

(RoHS Compliant)  
 (Halogen-Free)

P3 L 45 - 2 XX D1 BK X 001 B

1 2 3 4 5 6 7

- Standard: L=LCP
- Per ROW 02 to 50
- Taill Style: D1=With Peg  $\text{&Ocirc;}</math>0.64x0.45 Type$
- Color: BK=Black
- Contact Plated: C=Gold Flash A=Gold 3u"
- Special Options: D=Gold 5u" G=Gold 10u" L=Gold 15u" U=Gold 30u" B= Tube
- Packing: B= Tube

CONN TOP COMPONENT INC. @:P3L43T-1534-02D-2009/01/14-C @:2.65-2009/01/14-C		PART NO		P3L45-2XXD1BKX001B		.X		.XXX	
I: P3L45-2XXBKH1 BOM 2: @:P3L43T-1534-04D 3:		DRAWING NO		P127-00174		±0.3		±0.20	
TEL:(02)86481727 FAX:(02)86482427		DRAWN BY		GARY		2009/05/25		SCALE: 1:1	
		APPROVAL BY				EDITION: C1		ITEM: P127	
								UNIT: m.m	