



Current Rating: 1 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 500 V AC
 Operating Temperature: -40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 260° C for 10 seconds
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester, UL 94V-0
 Standard: LCP
 Finish: Tin, Gold Plated
 Standard: Gold Flash all over

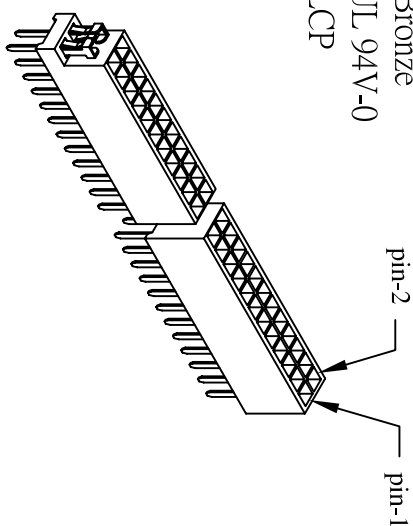

Recommended P.C. Board
 Hole Layout

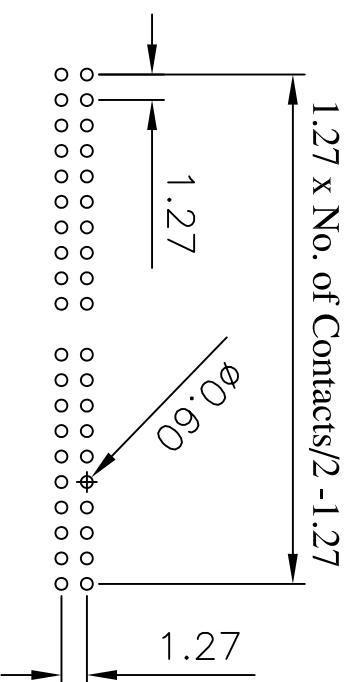

(RoHS Compliant)
 (Halogen-Free)

P3 L 45 - 2 XX S0 BK X 001 B
 1 2 3 4 5 6 7

- Standard: L=LCP
- Per ROW 02 to 50
- Taill Style: S0= Straight
- Color: BK=Black
- Contact Plated: C=Gold Flash
- Special Options: D=Gold 5u", G=Gold 10u", L=Gold 15u", U=Gold 30u"
- Packing: B= Tube



CONN TOP
 COMPONENT INC.

@:P3L43T-1534-02S-2009/01/14-C
 @:2.65-2009/01/14-C

1: P3L45-2XXSBKH0
 BOM 2: @:P3L43T-1534-04S
 3: TEL:(02)86481727 FAX:(02)86482427

PART NO	P3L45-2XXS0BKX001B	.X	.XX	.XXX
DRAWING NO	P127-00175	±0.3	±0.20	±0.100
DRAWN BY	GARY	EDITION: C1	ITEM: P127	SCALE: 1:1
APPROVAL BY				UNIT: m.m