

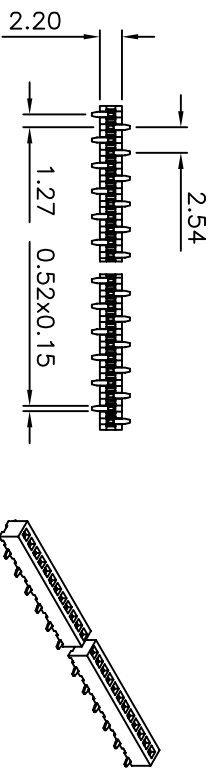
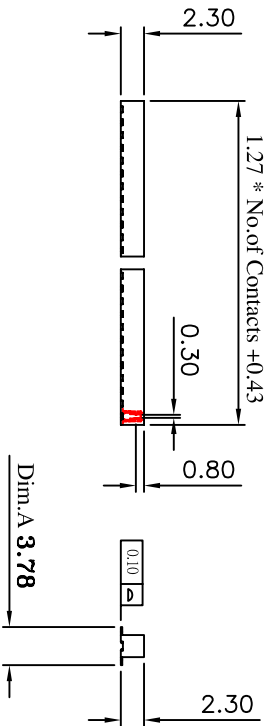
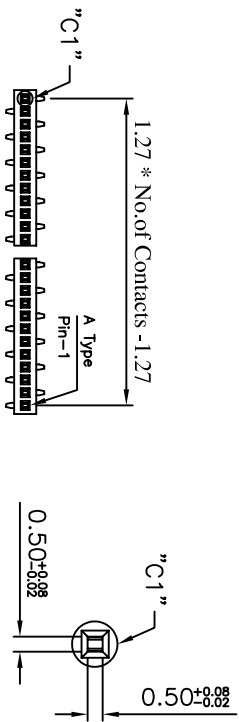
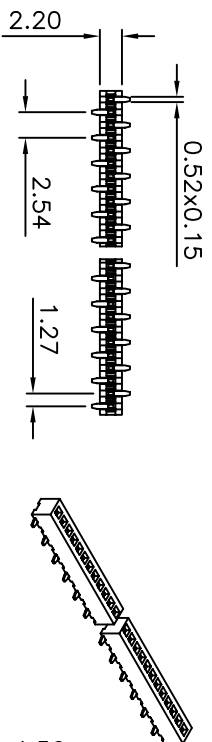


A TYPE

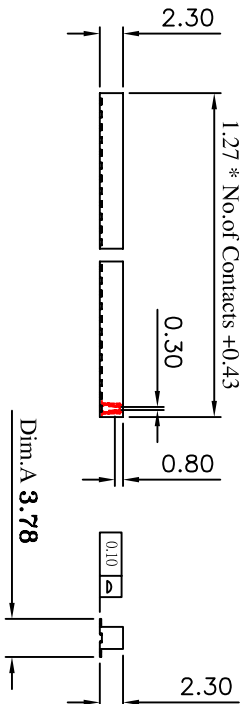


B TYPE

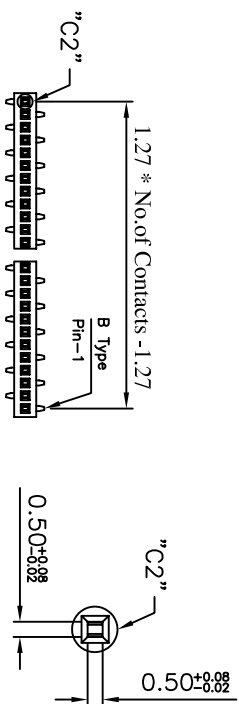

Current Rating: 1 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 500 V AC
 Operating Temperature: -40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester: UL 94V-0
 Standard: Nylon-6T
 Finish: Tin, Gold Plated
 Standard: Gold Flash all over


A TYPE

Recommended P.C. Board SMD Layout

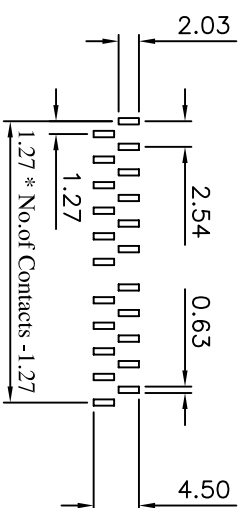

B TYPE

Recommended P.C. Board SMD Layout

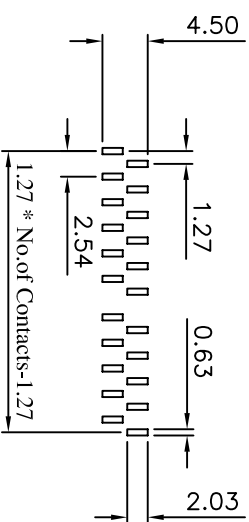

(RoHS Compliant) P3 N 22 - 1 XX DX BK X 000 X
 1 2 3 4 5 6 7

- Standard: N= Nylon-6T
- Per ROW 02 to 50
- Tail Style: DA= S.M.D A Type DB= S.M.D B Type
- Color: BK=Black D=Gold 5u" G=Gold 10u" L=Gold 15u" U=Gold 30u"
- Contact Plated: C=Gold Flash A=Gold 3u"
- Special Options: B= Tube C= Tray



CONN TOP
COMPONENT INC.

PART NO

P3N22-1XXDXBKX000X

X .XX .XXX
±0.3 ±0.20 ±0.100

BOM 1: P3N22-1XXBKHD
 2: P3N22T-1518-01D
 3: 0

DRAWING NO

P127-00191

ITEM: P127

TEL: (02)86481727 FAX: (02)86482427

DRAWN BY

GARY

SCALE: 1:1
UNIT: m.m

APPROVAL BY

2009/10/19

EDITION: C

SCALE: 1:1
UNIT: m.m