





A TYPE

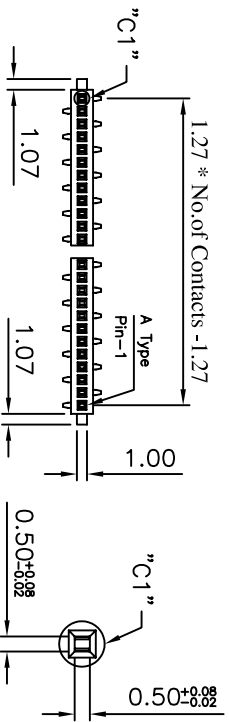


B TYPE

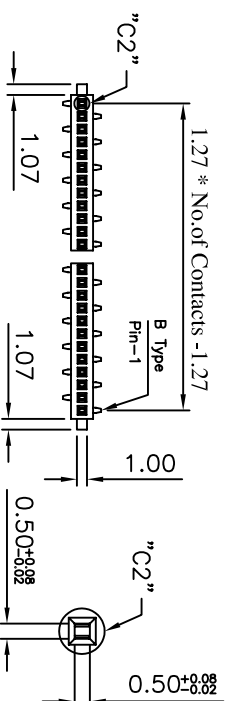




Current Rating: 1 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 500 V AC
 Operating Temperature: -40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester: UL 94V-0
 Standard: Nylon-6T

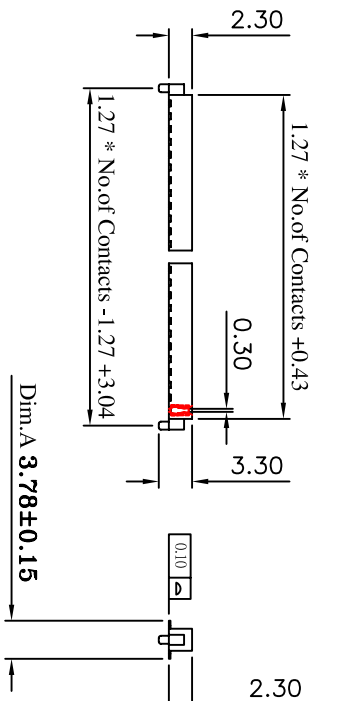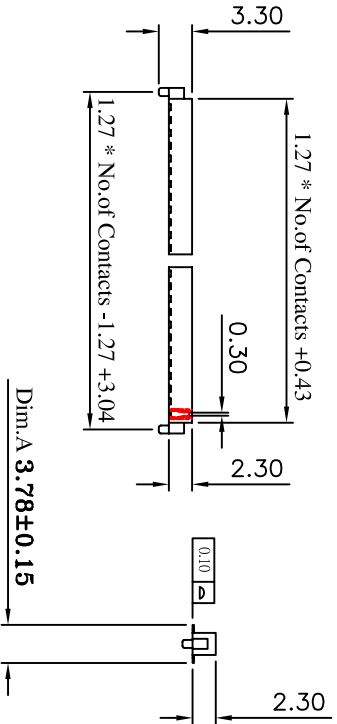

A TYPE
 Recommended P.C. Board
 SMD Layout

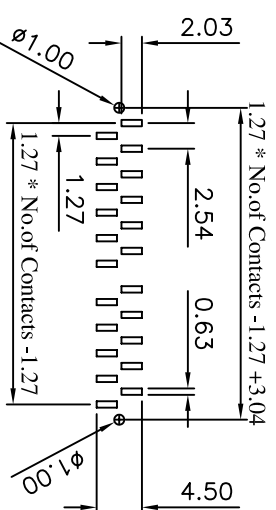


B TYPE
 Recommended P.C. Board
 SMD Layout

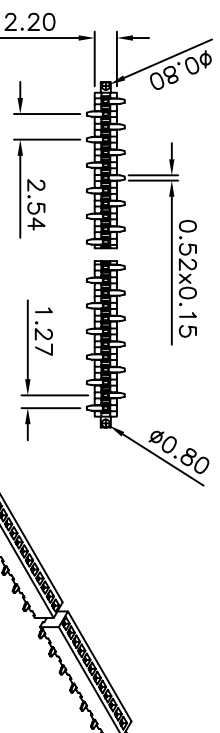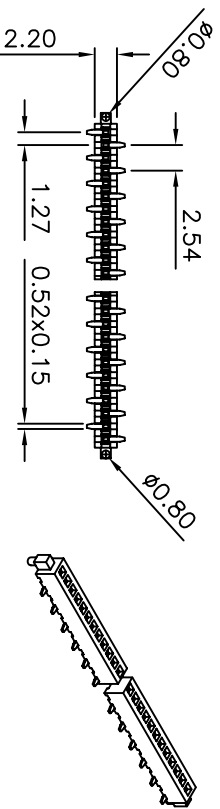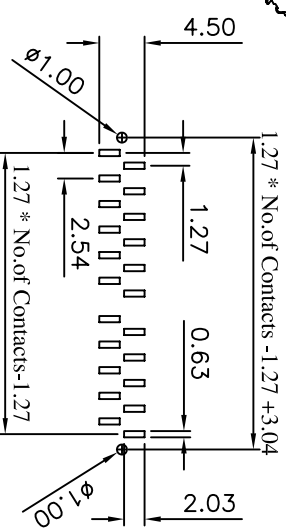

(RoHS Compliant) P3 N 22 - 1 XX DX BK X 000 X
 1 2 3 4 5 6 7

- Standard: N= Nylon-6T 4. Color: D=Gold 5u"
- Per ROW 03 to 50 BK=Black G=Gold 10u"
- Tail Style: 5. Contact Plated: L=Gold 15u"
D3= S.M.D A Type C=Gold Flash U=Gold 30u"
D4= S.M.D B Type A=Gold 3u"
- Special Options 6. Packing: B= Tube C= Tray

| | | | | | |
|---|--|-------------|--|--------------------|--|
|  CONN TOP COMPONENT INC. | | PART NO | | P3N22-1XXDXBKX000X | |
| I: P3N22-1XXBKHX2 BOM 2: P3N22T-1518-01D 3: 0 | | DRAWING NO | | P127-00123 | |
| TEL: (02)86481727 FAX: (02)86482427 | | DRAWN BY | | GARY | |
| | | APPROVAL BY | | | |
| | | .X | | .XX | |
| | | ±0.3 | | ±0.20 | |
| | | EDITION: C | | ITEM: P127 | |
| | | 2008/03/18 | | SCALE: 1:1 | |
| | | | | UNIT: m.m | |