

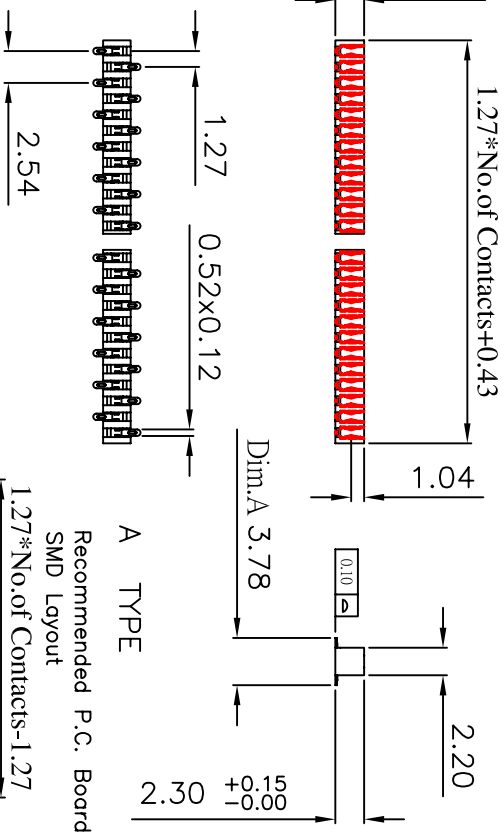
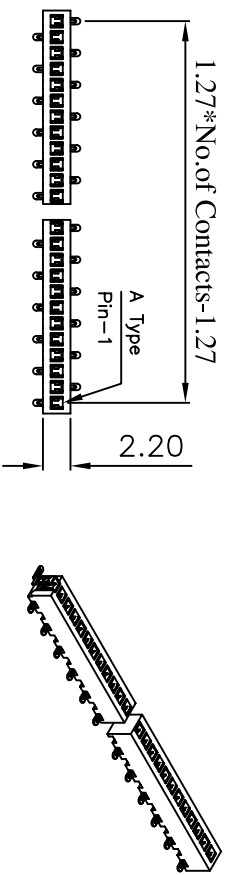


A TYPE

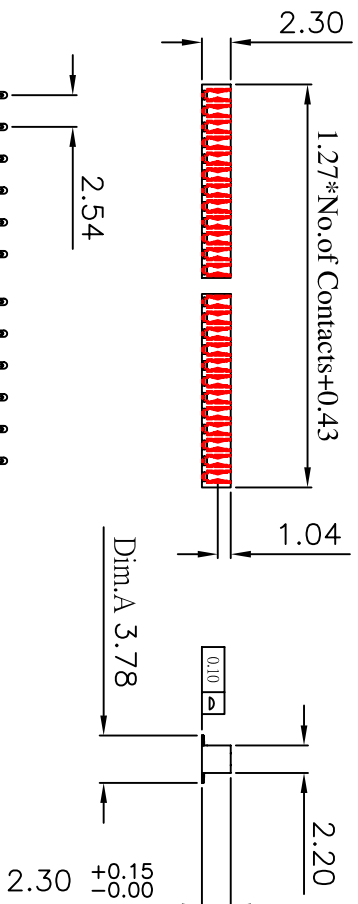

A TYPE
Recommended P.C. Board
SMD Layout

B TYPE

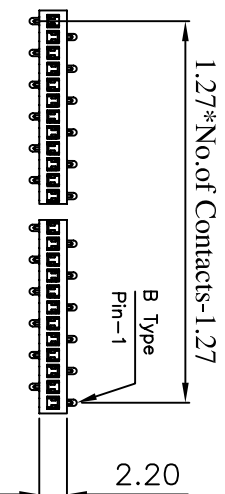

B TYPE
Recommended P.C. Board
SMD Layout

Current Rating: 1 Amps
Insulator Resistance: 5000 Megohms min
Dielectric Withstanding: 500 V AC
Operating Temperature: -40° ~ +105° C
Max Processing Temp: 230° C for 60 seconds
Max Processing Temp: 260° C for 10 seconds
Contact Material: Phosphor Bronze
Insulator Material: Polyester, UL 94V-0
Standard: Nylon-6T

Finish: Tin, Gold Plated
Standard: Gold Flash all over

P3 N 23 - 1 XX D0 BK X 000 B
1 2 3 4 5 6 7

- Standard: N= Nylon-6T
- Per ROW 03 to 50
- Tail Style: DA= S.M.D A Type DB= S.M.D B Type
- Color: BK=Black
- Contact Plated: C=Gold Flash U=Gold 30u"
- Special Options: D=Gold 5u" G=Gold 10u" L=Gold 15u" B= Tube
- Packing: B= Tube



PART NO		P3N23-1XXD0BKX000B		.X	
DRAWING NO		P127-00011		.XX	
DRAWN BY		GARY		.XXX	
APPROVAL BY				.000	
EDITION:		C1		ITEM: P127	
SCALE:		1:1		SCALE: 1:1	
UNIT:		m.m		UNIT: m.m	

BOM 1:		P3N23-1XXBKHD	
BOM 2:		P127T-1218-01D	
BOM 3:		0	

(RoHS Compliant)

©:P3N23-1XXD0BKX000-2007/04/18-C

TEL: (02)86481727 FAX: (02)86482427