
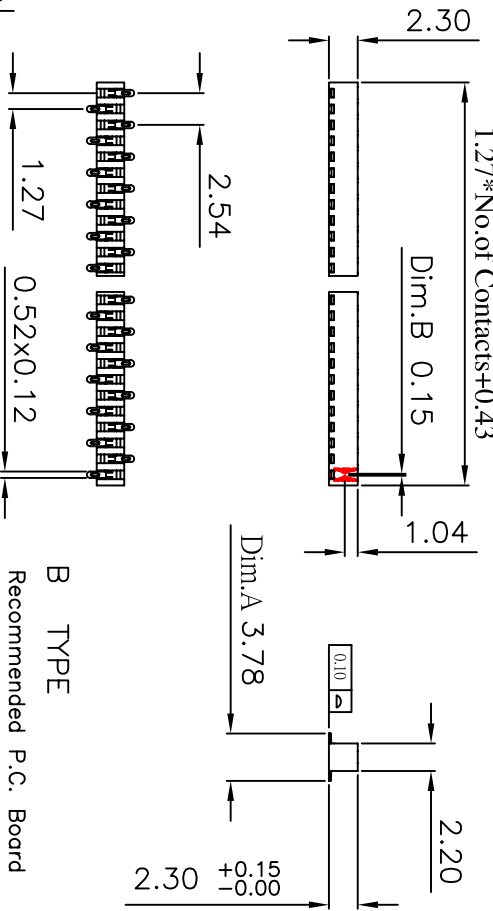
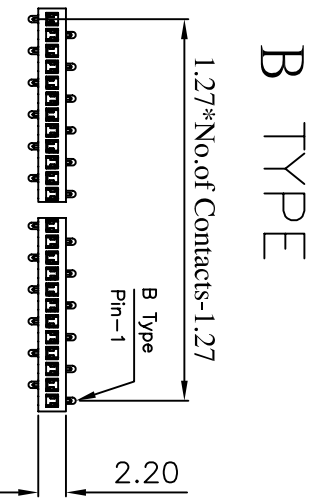
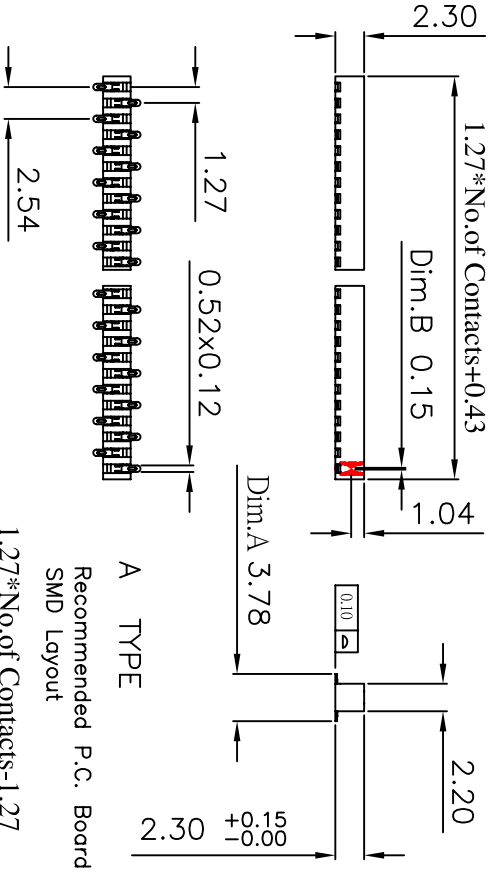


# A TYPE

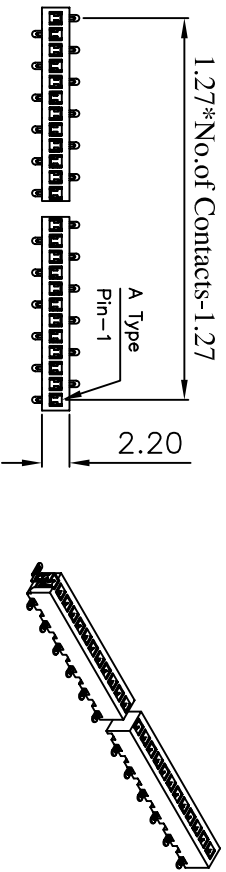

Current Rating: 1 Amps  
 Insulator Resistance: 5000 Megohms min  
 Contact Resistance: 20m ohms max.  
 Dielectric Withstanding: 500 V AC  
 Operating Temperature: -40° ~ +105° C  
 Max Processing Temp: 230° C for 60 seconds  
 Max Processing Temp: 260° C for 10 seconds  
 Contact Material: Copper Alloy  
 Insulator Material: Polyester, UL 94V-0  
 Standard: Nylon-6T

Finish: Tin, Gold Plated  
 Standard: Gold Flash all over

P3 N 23 - 1 XX D0 BK X 200 B  
 1 2 3 4 5 6 7

CONN TOP COMPONENT INC.  
 P127-00102  
 GARY

1: P3N23-1XXBKHD	PART NO	P3N23-1XXD0BKX200B	.X	.XX	.XXX
2: P127T-1218-01D-15	DRAWING NO	P127-00102	±0.3	±0.20	±0.100
3: 0	DRAWN BY	GARY		ITEM: P127	SCALE: 1:1
	APPROVAL BY			UNIT: m.m	

- Standard: N = Nylon-6T
- Per ROW 03 to 50
- Tail Style: DA = S.M.D A Type DB = S.M.D B Type
- Color: BK=Black
- Contact Plated: C=Gold Flash U=Gold 30u"
- Special Options: D=Gold 5u" G=Gold 10u" L=Gold 15u" B = Tube
- Packing: A=Gold 3u"

©:P3N23-1XXD0BKX200-2008/01/23-C  
 TEL:(02)86481727 FAX:(02)86482427

1: P3N23-1XXBKHD	PART NO	P3N23-1XXD0BKX200B	.X	.XX	.XXX
2: P127T-1218-01D-15	DRAWING NO	P127-00102	±0.3	±0.20	±0.100
3: 0	DRAWN BY	GARY		ITEM: P127	SCALE: 1:1
	APPROVAL BY			UNIT: m.m	