

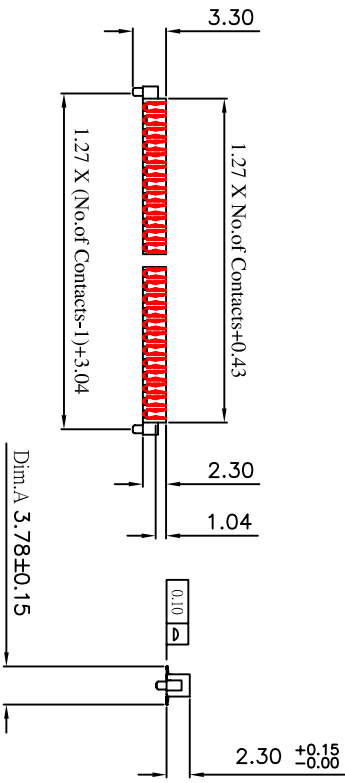
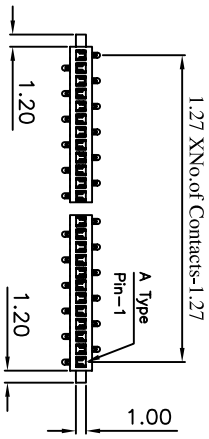





A TYPE

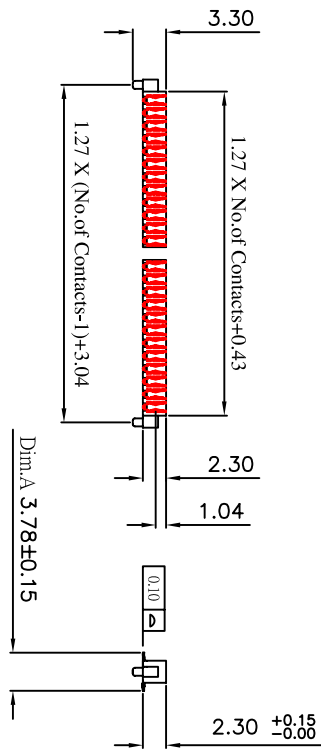

B TYPE

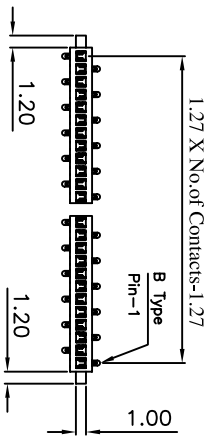

Current Rating: 1 Amps
 Insulator Resistance: 5000 Megohms min
 Dielectric Withstanding: 500 V AC
 Operating Temperature: -40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester, UL 94V-0
 Standard: Nylon-6T
 Finish: Tin, Gold Plated
 Standard: Gold Flash all over

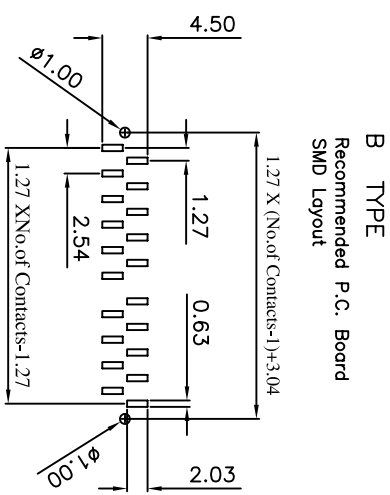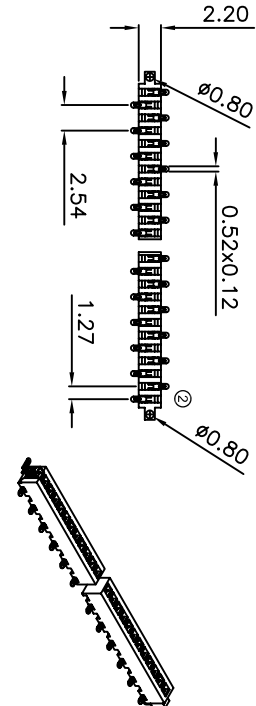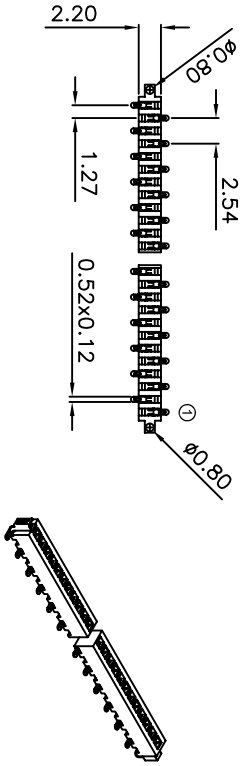

(RoHS Compliant)

P3 N 23 - 1 XX DX BK X 000 B
 1 2 3 4 5 6 7

- Standard: N= Nylon-6T
- Per ROW 03 to 50
- Taill Style: D3= S.M.D A Type D4= S.M.D B Type
- Color: BK=Black
- Contact Plated: C=Gold Flash U=Gold 30u"

6. Special Options

- Packing: B= Tube



CONN TOP
 COMPONENT INC.

©:P3N23-1XXXDXBKX000-2007/11/18-CI
 ©:B Type Pin-1 - 2007/04/18 - C
 ©:A Type Pin-1 - 2007/04/18 - C

PART NO

P3N23-1XXXDXBKX000B

X .XX .XXX
 ±0.3 ±0.20 ±0.100

1: P3N23-1XXXBKHZ

DRAWING NO

P127-00020

EDITION: C2

2: P127T-1218-01D

DRAWN BY

GARY

SCALE: 1:1

3: 0

APPROVAL BY

2009/03/06

UNIT: m.m