

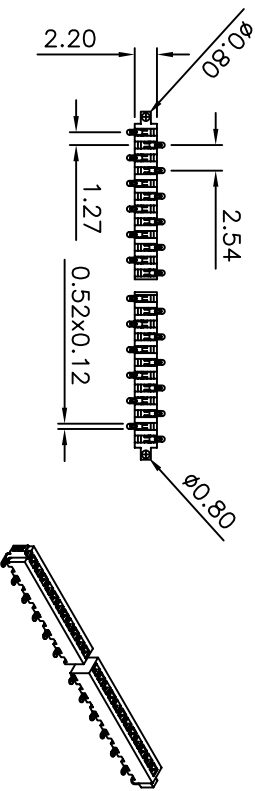
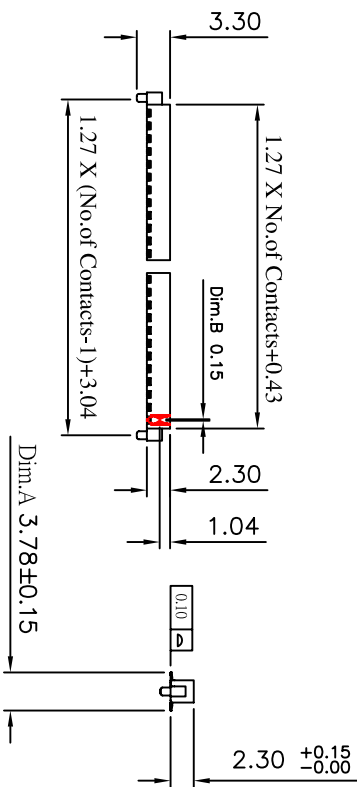
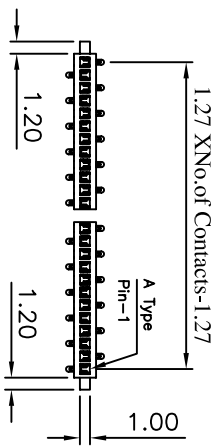
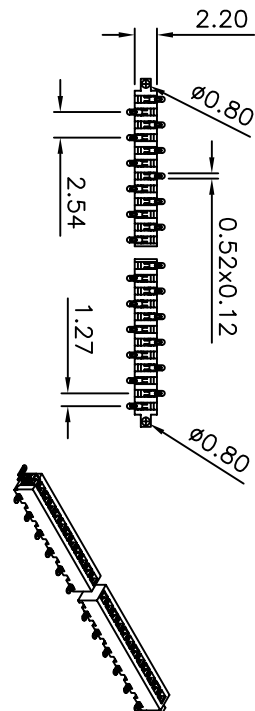


A TYPE

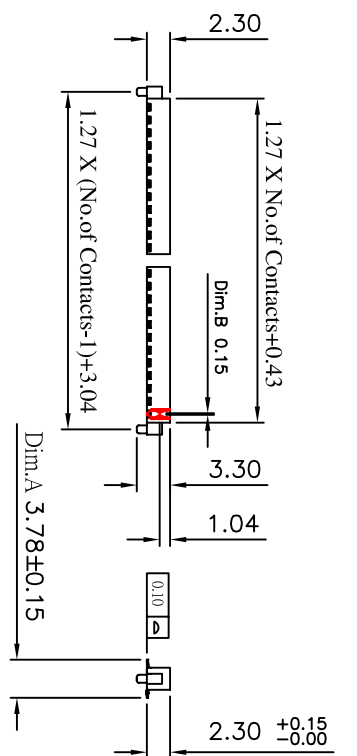


B TYPE

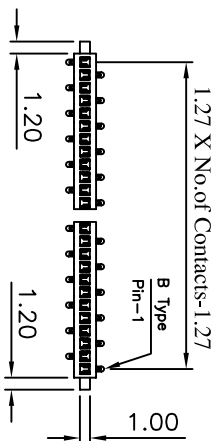


Current Rating: 1 Amps
 Insulator Resistance: 5000 Megohms min
 Dielectric Withstanding: 500 V AC
 Operating Temperature: -40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester, UL 94V-0
 Standard: Nylon-6T
 Finish: Tin, Gold Plated
 Standard: Gold Flash all over

A TYPE

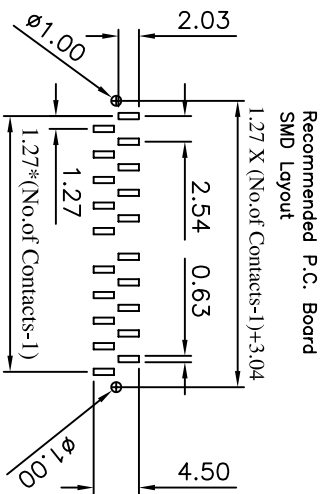

B TYPE

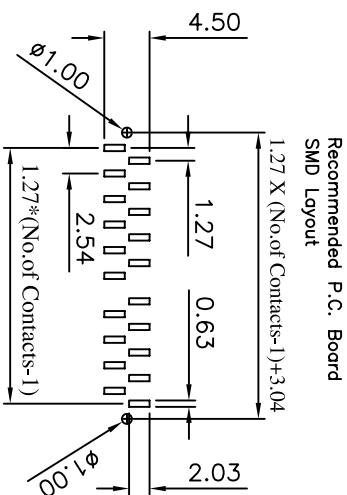

(RoHS Compliant)

P3 N 23 - 1 XX DX BK X 200 B
 1 2 3 4 5 6 7

- Standard: N= Nylon-6T
- Per ROW 03 to 50
- Tail Style: D3= S.M.D A Type D4= S.M.D B Type
- Color: BK=Black
- Contact Plated: C=Gold Flash U=Gold 30u"

- Special Options
- Packing: B= Tube



CONN TOP COMPONENT INC.

PART NO

P3N23-1XXDXBKX200B

.X .XX .XXX
 ±0.3 ±0.20 ±0.100

1: P3N23-1XXBKHX2

DRAWING NO

P127-00103

EDITION: C1 ITEM: P127

2: P127T-1218-01D-15

DRAWN BY

GARY

2009/03/06 SCALE: 1:1

3: TEL:(02)86481727 FAX:(02)86482427

APPROVAL BY

UNIT: m.m