

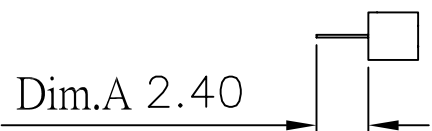
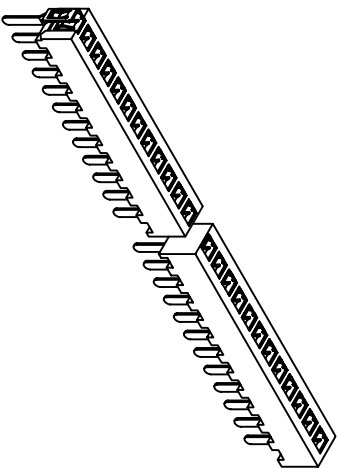
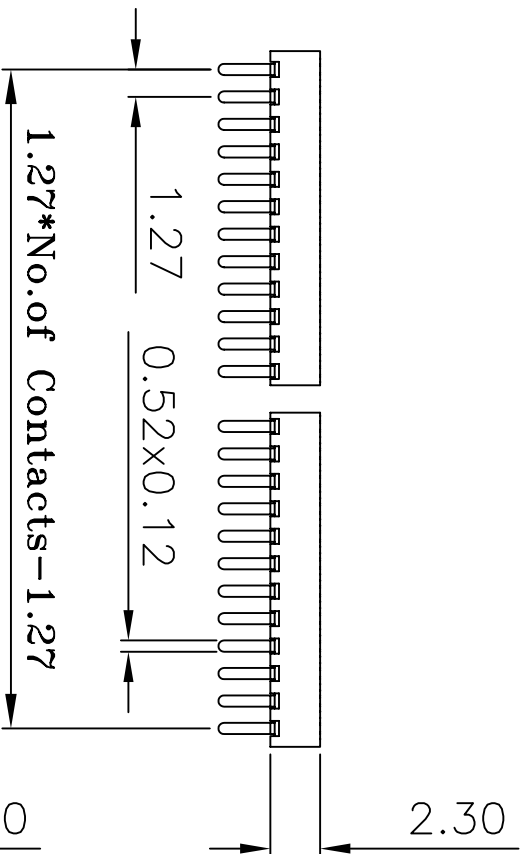


1.27 X No.of Contacts+0.43

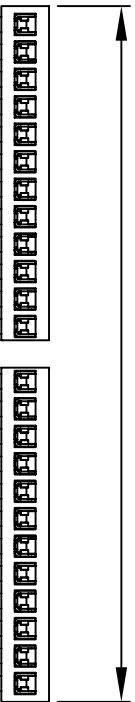

Recommended P.C. Board
Hole Layout

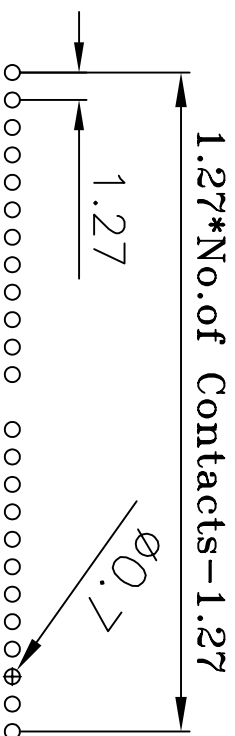

1.27*No.of Contacts-1.27

(RoHS Compliant) P3 N 23 - 1 XX S0 BK X 000 X

- Standard: N= Nylon-6T
- Per ROW 02 to 50
- Tail Style: S0 = Straight
- Color: BK=Black
- Contact Plated: C=Gold Flash
- Contact Style: A=Gold 3u"
- Special Options: D=Gold 5u", G=Gold 10u", L=Gold 15u", U=Gold 30u"
- Packing: B= Tube, C= Tray, D= Box

Current Rating: 1 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20m ohms max.
 Dielectric Withstanding: 500 V AC
 Operating Temperature: -40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Copper Alloy
 Insulator Material: Polyester; UL 94V-0
 Standard: Nylon-6T
 Finish: Tin, Gold Plated
 Standard: Gold Flash all over



CONN TOP
COMPONENT INC.

©:P3N23-1XXS0BKX000-2008/01/23-C1
 ©:P127T-1218-01S-15--(02-10pin)2007/04/18-C

1:	P3N23-1XXBKHO	PART NO	P3N23-1XXS0BKX000X	.X	.XXX
BOM 2:	©: P127T-1218-01S	DRAWING NO	P127-00014	±0.3	±0.20
3:		DRAWN BY	GARY	EDITION: C2	ITEM: P127
		APPROVAL BY		SCALE: 1:1	UNIT: m.m
TEL: (02)86481727 FAX: (02)86482427					