

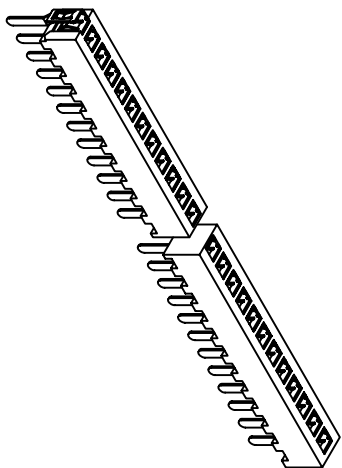
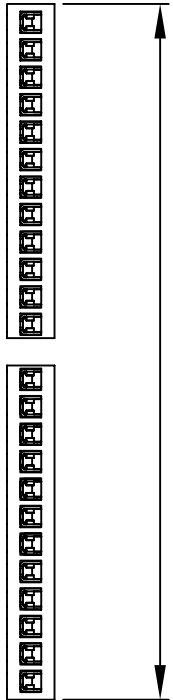


1.27 X No.of Contacts+0.43

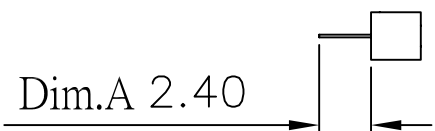


Dim. B 0.15

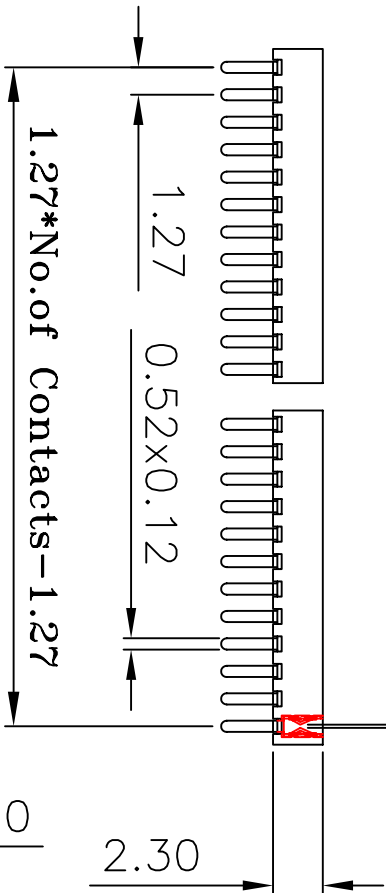

Recommended P.C. Board
Hole Layout

1.27*No.of Contacts-1.27

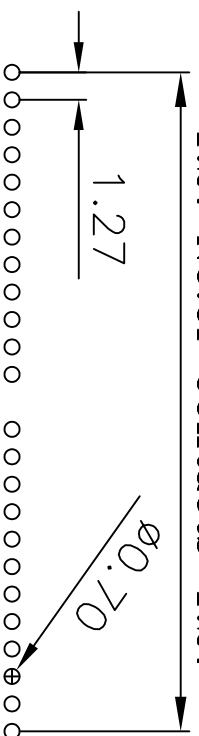

(RoHS Compliant)

P3 N 23 - 1 XX S0 BK X 200 X
1 2 3 4 5 6 7

- Standard: N= Nylon-6T
- Per ROW 02 to 50
- Taill Style:
S0 = Straight
- Color:
BK=Black
- Contact Plated:
C=Gold Flash
A=Gold 3u"
- Special Options:
D=Gold 5u"
G=Gold 10u"
L=Gold 15u"
U=Gold 30u"
- Packaging:
B= Tube
C= Tray
D= Box

Current Rating: 1 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20m ohms max.
 Dielectric Withstanding: 500 V AC
 Operating Temperature: -40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Copper Alloy
 Insulator Material: Polyester; UL 94V-0
 Standard: Nylon-6T
 Finish: Tin, Gold Plated
 Standard: Gold Flash all over

©:P3N23-1XXXS0BKX200-2008/01/23-C



CONN TOP
COMPONENT INC.

PART NO

P3N23-1XXXS0BKX200X

.X

.XX

.XXX

1: P3N23-1XXXBKHO

DRAWING NO

P127-00105

EDITION: C1

ITEM: P127

2: P127T-1218-01S-15

DRAWN BY

GARY

2009/07/01

SCALE: 1:1

3: APPROVAL BY

TEL:(02)86481727 FAX:(02)86482427

APPROVAL BY

UNIT: m.m