

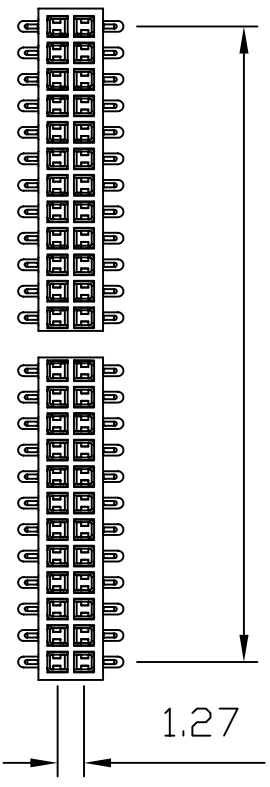
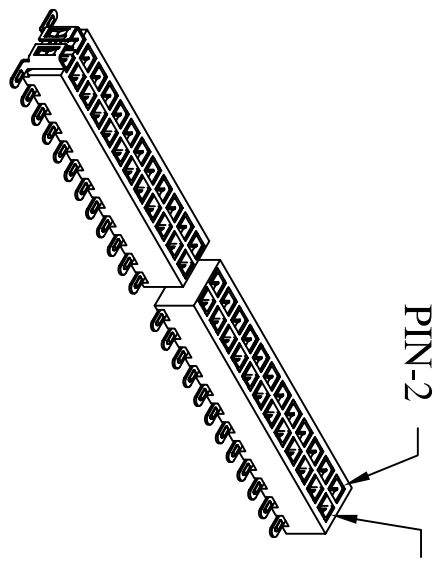


1.27XNO. of Contacts-1.27

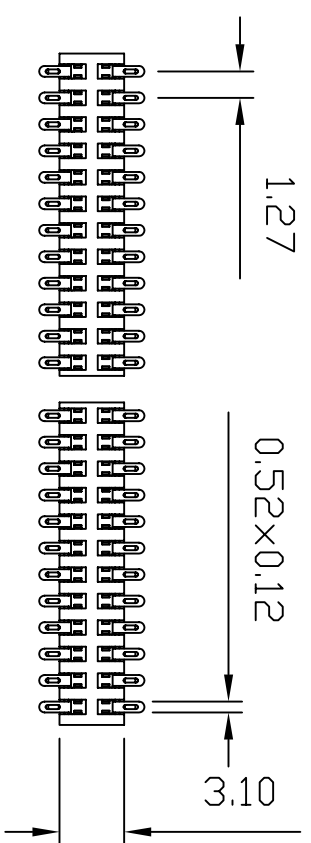


1.27 X NO. of Contacts+0.45

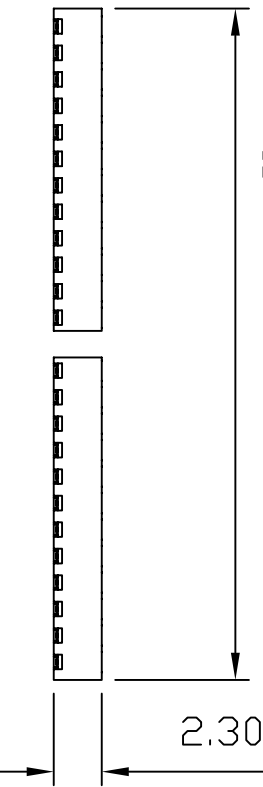

Current Rating: 1 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20m ohms max.
 Dielectric Withstanding: 500 V AC
 Operating Temperature: -40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Copper Alloy
 Insulator Material: Polyester, UL 94V-0
 Standard: Nylon-6T

Recommended P.C. Board
 SMD Layout

1.27XNO. of Contacts-1.27

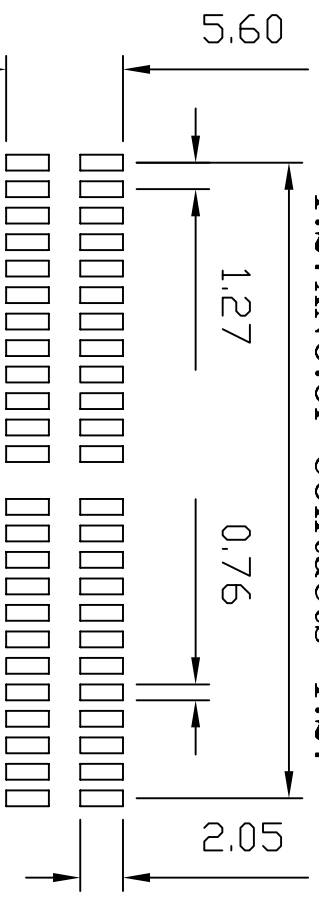

(RoHS Compliant)
 P3 N 23 - 2 XX D0 BK X 000 B
 1 2 3 4 5 6 7

- Standard: N= Nylon-6T
- Per Row: 02 to 50
- Tail Style: D0= SMD No Peg Type
- Color: BK=Black
- Contact Plated: C=Gold Flash U=Gold 30u' A=Gold 3u'
- Special Options: D=Gold 5u' G=Gold 10u' L=Gold 15u' U=Gold 30u' B= Tube
- Packings: B= Tube



①:P3N23-2XXD0BKX000-2008/01/23-C1		PART NO		P3N23-2XXD0BKX000B	.X	.XX	.XXX
②:P127T-1218-01D-15-(02-10pin)-2007/04/18-C		DRAWING NO		P127-00027	±0.3	±0.20	±0.100
③:P127T-1218-01D		DRAWN BY		GARY	EDITION: C2	ITEM: P127	SCALE: 1:1
TEL: (02)86481727 FAX: (02)86482427		APPROVAL BY					UNIT: m.m