

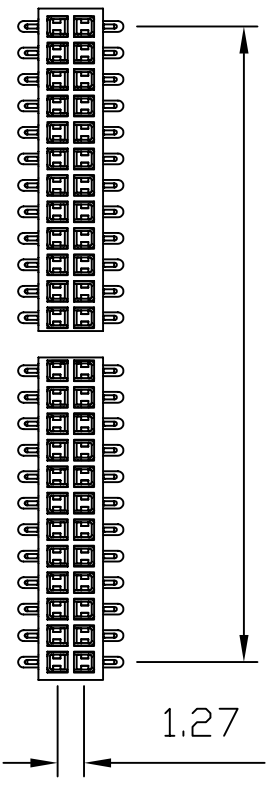




1.27XNO. of Contacts-1.27

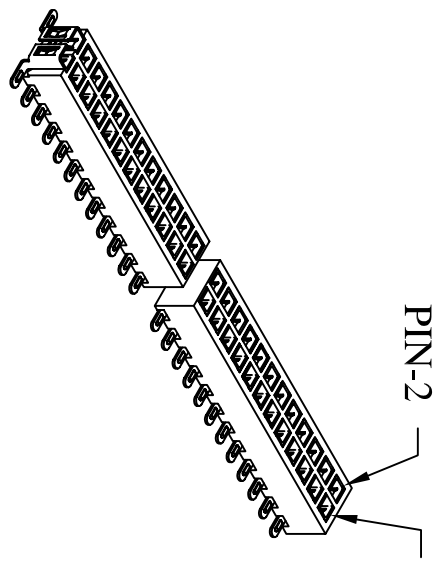


1.27 X NO. of Contacts+0.45

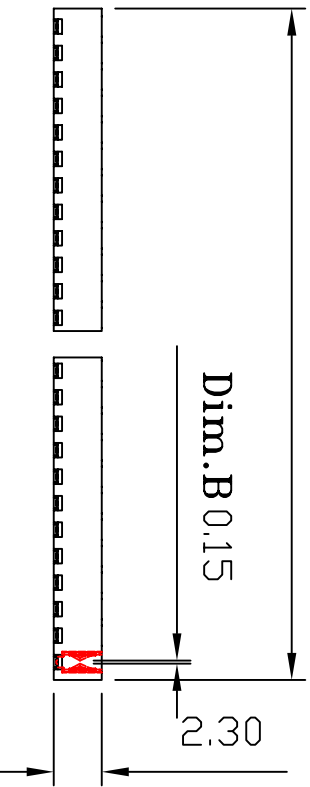

Dim.A 5.05

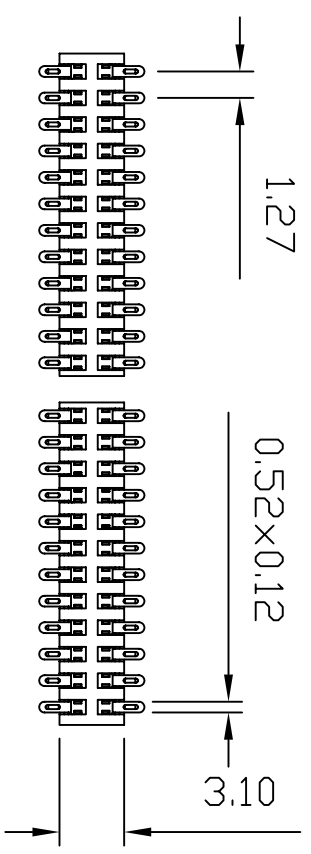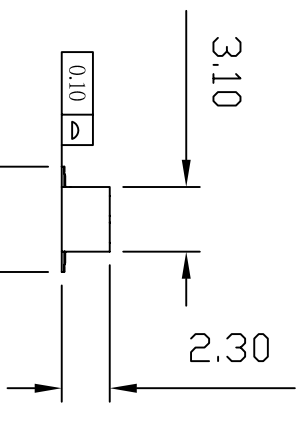

1.27XNO. of Contacts-1.27

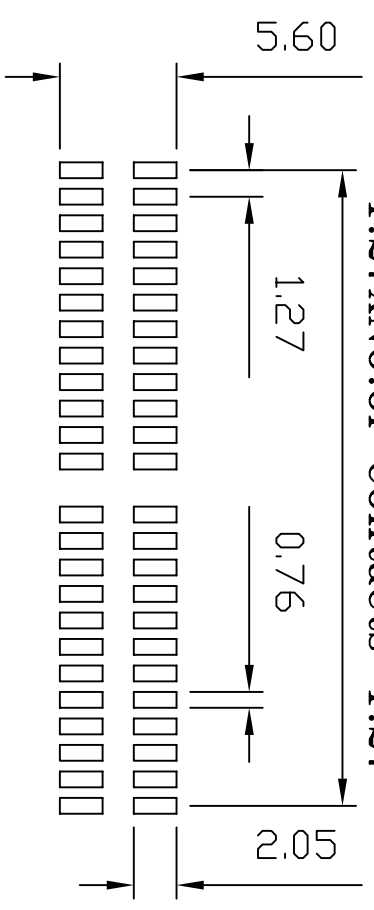

Current Rating: 1 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20m ohms max.
 Dielectric Withstanding: 500 V AC
 Operating Temperature: -40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Copper Alloy
 Insulator Material: Polyester, UL 94V-0
 Standard: Nylon-6T

Finish: Tin, Gold Plated
 Standard: Gold Flash all over

Recommended P.C. Board
 SMD Layout

(RoHS Compliant)
 P3 N 23 - 2 XX D0 BK X 200 B
 1 2 3 4 5 6 7

- Standard: N= Nylon-6T
- Per Row: 02 to 50
- Tail Style: D0= SMD No Peg Type
- Color: BK=Black
- Contact Plated: C=Gold Flash
- Special Options: D=Gold 5u', G=Gold 10u', L=Gold 15u', U=Gold 30u', A=Gold 3u'
- Packings: B= Tube



CONN TOP
 COMPONENT INC.

PART NO	P3N23-2XXD0BKX200B	.X	.XX	.XXX
DRAWING NO	P127-00107	±0.3	±0.20	±0.100
DRAWN BY	GARY	EDITION: C1	ITEM: P127	SCALE: 1:1
APPROVAL BY				UNIT: m.m

①:P3N23-2XXD0BKX200-2008/01/23-C
 BOM 1: P3N23-2XXBKHO
 2: P127T-1218-01D-15
 3: TEL:(02)86481727 FAX:(02)86482427