
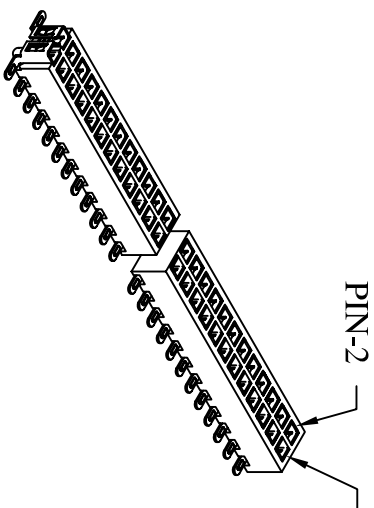




1.27XNO.of Contacts/2-1.27

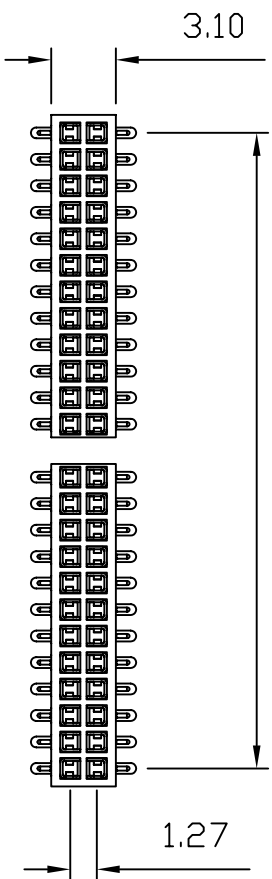

PIN-2



PIN-1

Current Rating: 1 Amps  
 Insulator Resistance: 5000 Megohms min  
 Contact Resistance: 20m ohms max.  
 Dielectric Withstanding: 500 V AC  
 Operating Temperature: -40° ~ +105° C  
 Max Processing Temp: 230° C for 60 seconds  
 Max Processing Temp: 260° C for 10 seconds  
 Contact Material: Copper Alloy  
 Insulator Material: Polyester, UL 94V-0  
 Standard: Nylon-6T  
 Finish: Tin, Gold Plated  
 Standard: Gold Flash all over

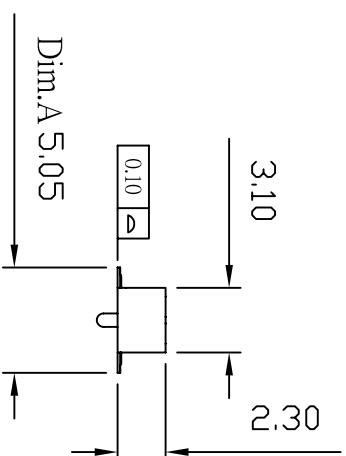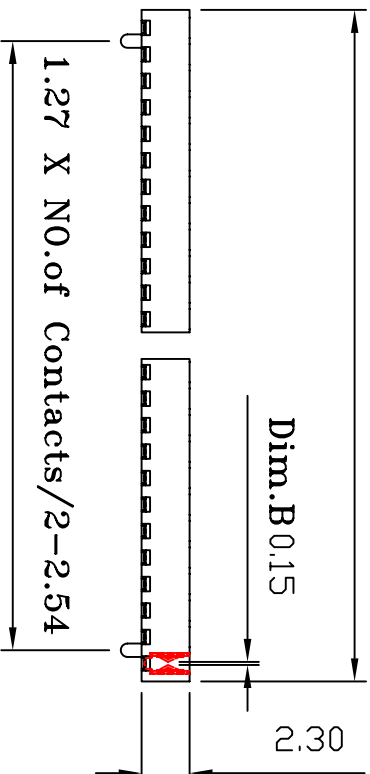

Recommended P.C. Board  
 SMD Layout

1.27XNO.of Contacts-12.7

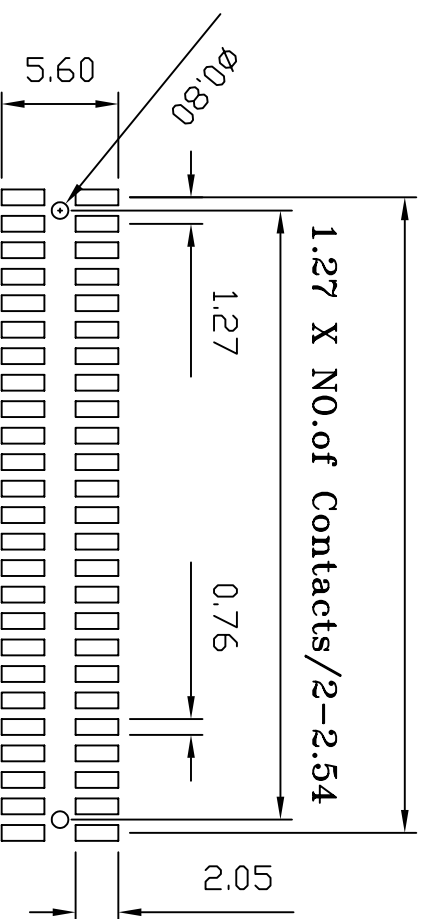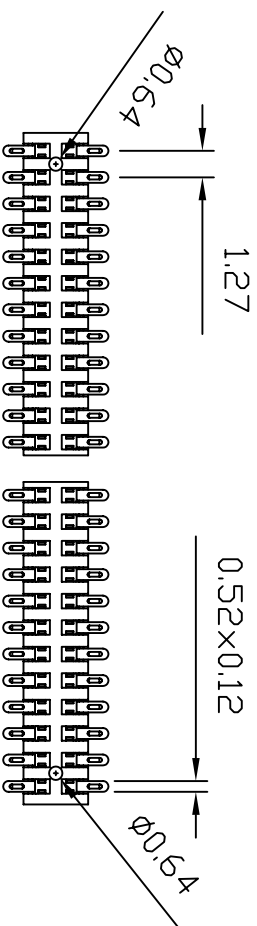

(RoHS Compliant)

P3 N 23 - 2 XX D1 BK X 200 B  
 1 2 3 4 5 6 7

1. Standard: N= Nylon-6T
2. Per Row: 02 to 50
3. Tail Style: D1= S.M.D With Peg Type
4. Color: BK=Black
5. Contact Plated: C=Gold Flash
6. Special Options: D=Gold 5u", G=Gold 10u", L=Gold 15u", U=Gold 30u", A=Gold 3u"
7. Packing: B= Tube



CONN TOP  
 COMPONENT INC.

PART NO P3N23-2XXD1BKX200B

.X .XX .XXX  
 ±0.3 ±0.20 ±0.100

1: P3N23-2XXBKHI

DRAWING NO P127-00109

EDITION: C1 ITEM: P127

2: P127T-1218-01D-15

DRAWN BY GARY

2009/07/01 SCALE: 1:1

3:

APPROVAL BY

UNIT: m.m

TEL:(02)86481727 FAX:(02)86482427

©:P3N23-2XXD1BKX200-2008/01/23-C