

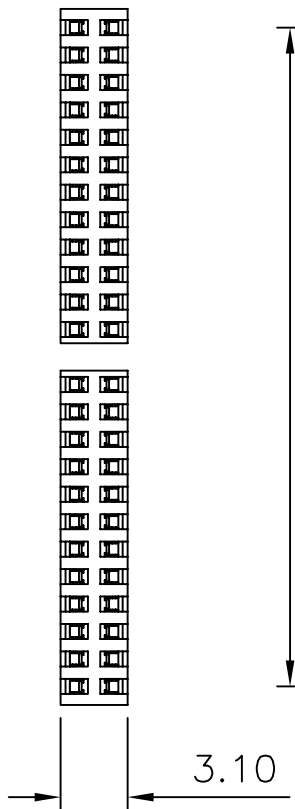
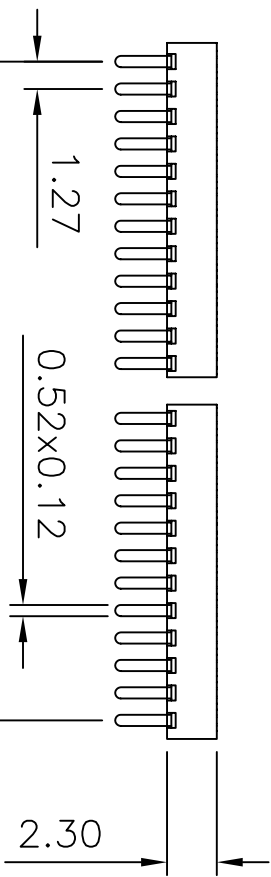
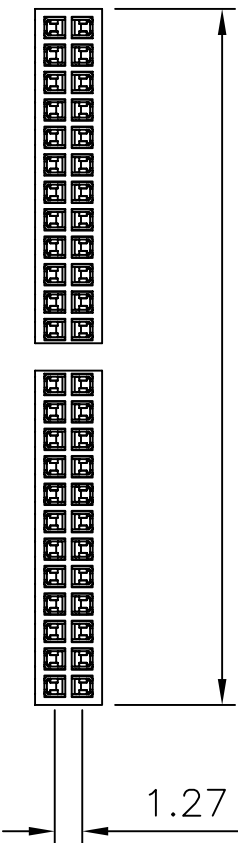


1.27*No.of Contacts/2+0.45

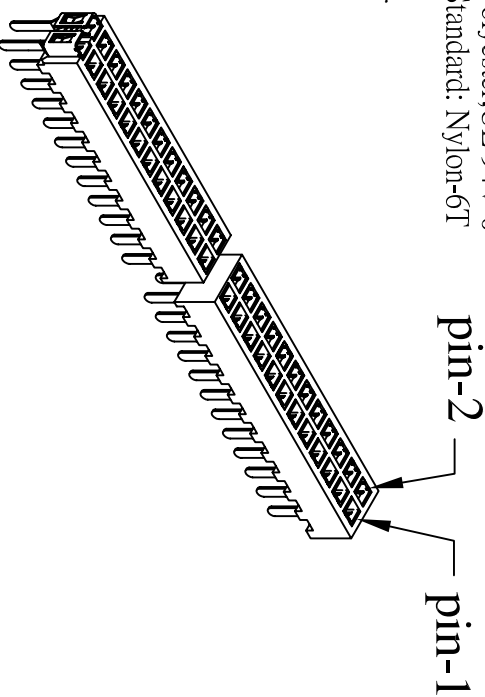


Current Rating: 1 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20m ohms max.
 Dielectric Withstanding: 500 V AC
 Operating Temperature: -40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Copper Alloy
 Insulator Material: Polyester, UL 94V-0
 Standard: Nylon-6T

Finish: Tin, Gold Plated
 Standard: Gold Flash all over



Recommended P.C. Board
 Hole Layout

1.27*No.of Contacts/2-1.27

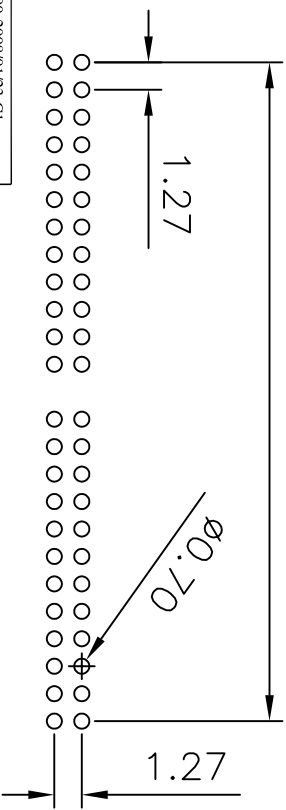

(RoHS Compliant) P3 N 23 - 2 XX S0 BK X 000 X
 1 1 2 3 4 5 6 7

- Standard: N= Nylon-6T
- Per ROW 02 to 50
- Tail Style:
S0 = Straight
- Color: BK=Black
- Contact Plated: L=Gold 15u"
C=Gold Flash
U=Gold 30u"
A=Gold 3u"
- Special Options: D=Gold 5u"
G=Gold 10u"
B=Tube
C=Troy
D=Box
- Packing: B=Tube
C=Troy
D=Box



CONN TOP
 COMPONENT INC.

①:P3N23-2XXS0BKX000-2008/01/23-C1		PART NO		P3N23-2XXS0BKX000X	.X	.XXX
②:P127T-1218-01S-15---(02-10pin)2007/04/18-C		DRAWING NO		P127-00032	±0.3	±0.100
③:P127T-1218-01S		DRAWN BY		GARY	EDITION: C2	ITEM: P127
TEL: (02)86481727 FAX: (02)86482427		APPROVAL BY			SCALE: 1:1	UNIT: m.m