

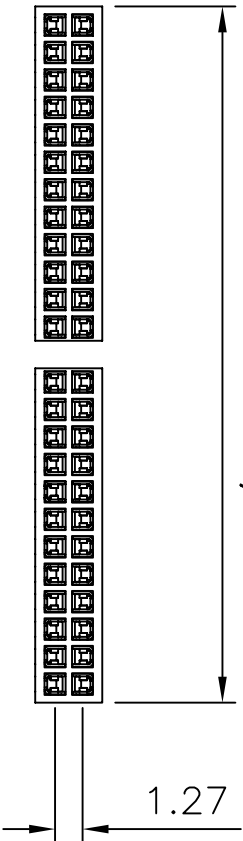


1.27\*No. of Contacts/2+0.45

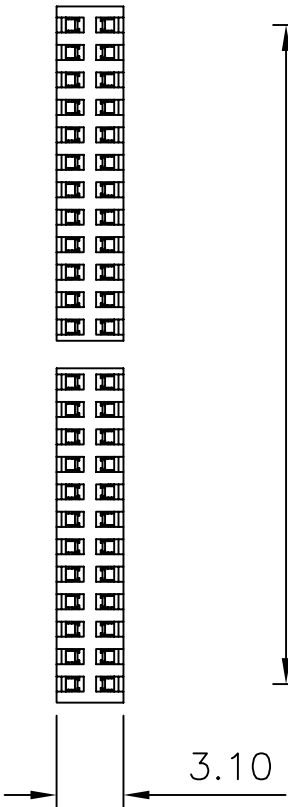

Dim. B 0.15

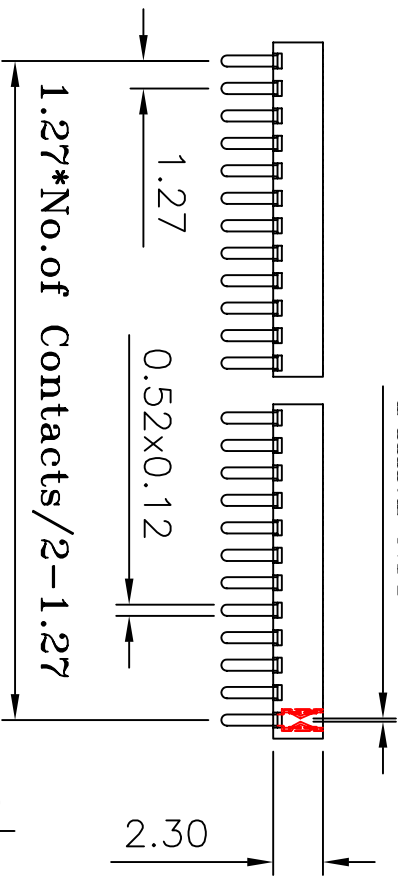

Current Rating:

1 Amps

Insulator Resistance:

5000 Megohms min

Contact Resistance:

20m ohms max.

Dielectric Withstanding:

500 V AC

Operating Temperature:

- 40° ~ +105° C

Max Processing Temp:

230° C for 60 seconds

Max Processing Temp:

260° C for 10 seconds

Contact Material:

Copper Alloy

Insulator Material:


Polyester, UL 94V-0

Finish: Tin, Gold Plated


pin-2  
pin-1

Standard: Gold Flash all over

Standard: Nylon-6T




Dim. A 2.40

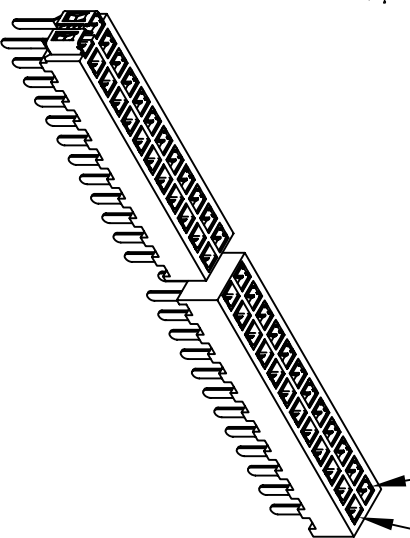

Recommended P.C. Board  
Hole Layout

1.27\*No. of Contacts/2-1.27

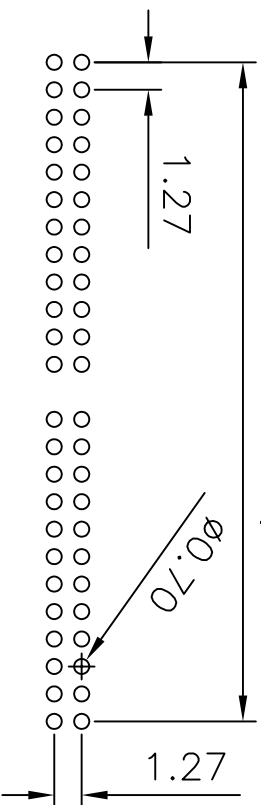

(RoHS Compliant)

P3 N 23 - 2 XX S0 BK X 200 X  
1 2 3 4 5 6 7

1. Standard: N= Nylon-6T

4. Color:

BK=Black

D=Gold 5u"

2. Per ROW 02 to 50

5. Contact Plated:

C=Gold Flash

L=Gold 15u"

3. Tail Style:

S0= Straight

A=Gold 3u"

U=Gold 30u"



CONN TOP  
COMPONENT INC.

©:P3N23-2XXXS0BKX200-2008/01/23-C

PART NO

P3N23-2XXXS0BKX200X

.X

±0.3

.XXX

±0.100

1: P3N23-2XXXBKHO

DRAWING NO

P127-00113

EDITION: C1

ITEM: P127

2: P127T-1218-01S-15

DRAWN BY

GARY

2009/07/01

SCALE: 1:1

3:

APPROVAL BY

UNIT: m.m

TEL: (02)86481727 FAX: (02)86482427