



Current Rating: 1 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20m ohms max.
 Dielectric Withstanding: 500 V AC
 Operating Temperature: -40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Copper Alloy
 Insulator Material: Polyester, UL 94V-0
 Standard: Nylon-6T


Finish: Tin, Gold Plated
 Standard: Gold Flash all over



Dim.A 2.40

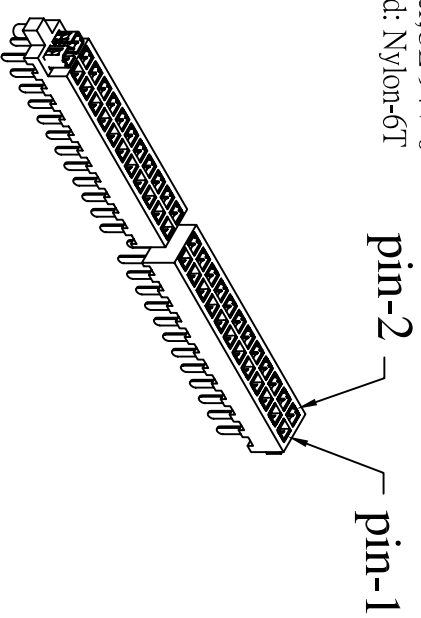

Recommended P.C. Board Hole Layout

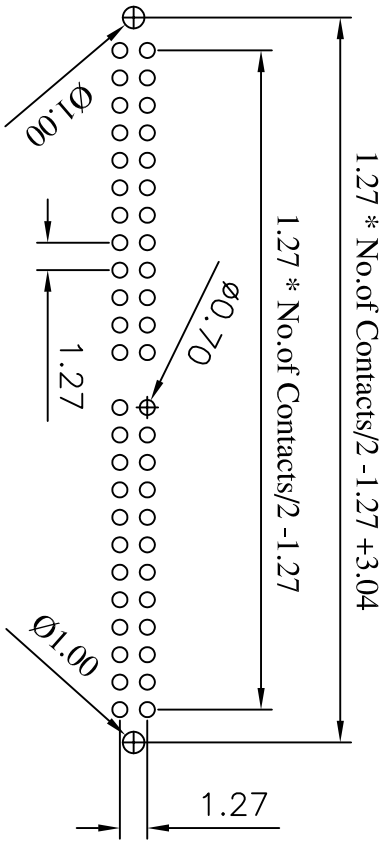

(RoHS Compliant) P3 N 23 - 2 XX S2 BK X 000 X
 1 2 3 4 5 6 7

- Standard: N= Nylon-6T
- Per ROW 02 to 50
- Tail Style: S2= Straight With Peg ϕ 1.00x0.80 Type
- Color: BK=Black
- Contact Plated: C=Gold Flash
- Special Options: B= Tube, C= Tray, D= Box

		PART NO		.X	
P3N23-2XXXBKX000X		DRAWING NO		.XX	
P127T-1218-01S		DRAWN BY		.XXX	
GARY		GARY		±0.3	
2008/10/15		EDITION: C		±0.20	
APPROVAL BY		SCALE: 1:1		±0.100	
TEL: (02)86481727 FAX: (02)86482427		UNIT: m.m		ITEM: P127	