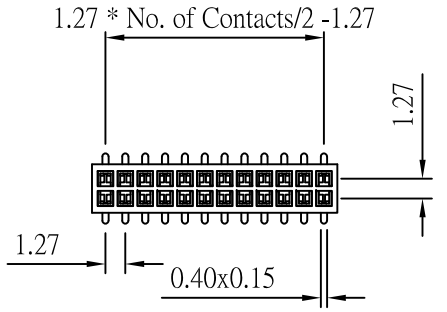

Recommended P.C. Board
SMD Layout

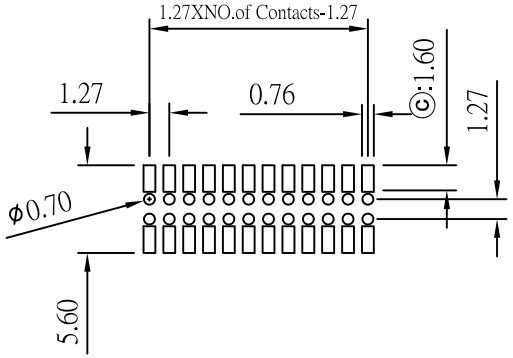

Current Rating and Voltage: 1 Amps 250V AC (r.m.s)
Insulator Resistance: 5000 Megohms min
Contact Resistance: 20 m ohms max
Dielectric Withstanding: 500 V AC
Operating Temperature: - 40° ~ +105° C
Max Processing Temp: 230° C for 60 seconds
Max Processing Temp: 260° C for 10 seconds
Contact Material: Phosphor Bronze
Insulator Material: High Temperature Plastic,UL 94V-0
Finish: Standard: Gold Flash all over

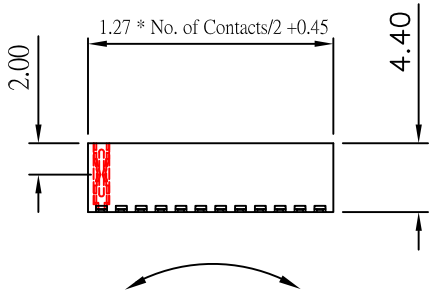

04~20 pin : 0.10mm
22~60 pin : 0.20mm
62~100 pin : 0.30mm

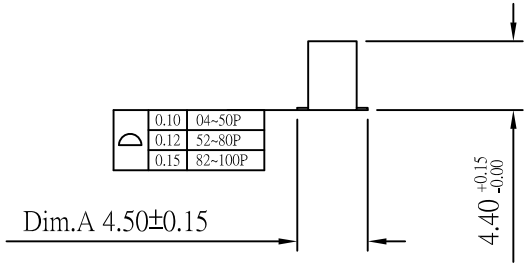

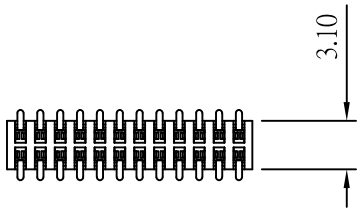

Enable 3D View

(RoHS Compliant)

P3 X 44 - 2 XX D0 BK X 000 X
1 2 3 4 5 6 7

1. Insulator Material:
   B= Nylon-9T
   N= Nylon-6T
2. Per ROW 02 to 50
3. Taill Style:
   D0= S.M.D No Peg Tyep
4. Color:
   BK=Black
5. Contact Plated:
   C=Gold Flash
   A=Gold 3u"
   D=Gold 5u"
   G=Gold 10u"
   L=Gold 15u"
   U=Gold 30u"
6. Special Options
7. Packing:
   B= Tube

ⓔ: Update(版面更新)-2012/05/14-C5
ⓓ:P3N44-2XXD0BKX000B-2011/02/17-C4
ⓒ:2.05-2008/03/24-C3
ⓑ:P3N44-2XXD0BKX000-2008/01/21-C2
ⓐ:P127T-153816D-(32~100pin)-2007/05/31-C1

CONN TOP COMPONENT INC.
No.1, Lane 56, Ta-An Street, Hsi-Chih City, Taipei Hsien, Taiwan,
Tel:886-2-86481727 Fax:886-2-86482427
Homepage:http//www.conntop.com.tw

PART NO	P3X44-2XXD0BKX000X		.X ±0.3	.XX ±0.20 .XXX ±0.100
DRAWING NO	P127-00055	EDITION: C6	ITEM: P127	
DRAWN BY	Jyun-Hao	2020/09/15	SCALE: 1:1	
APPROVAL BY	Peter pan	2020/09/15	UNIT: m.m	