

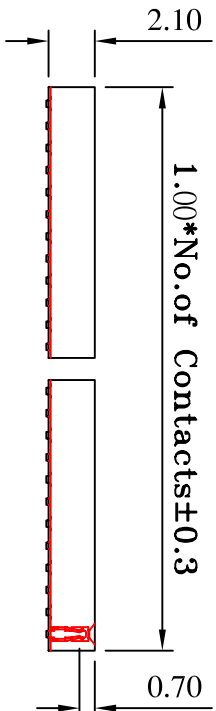


# A Type


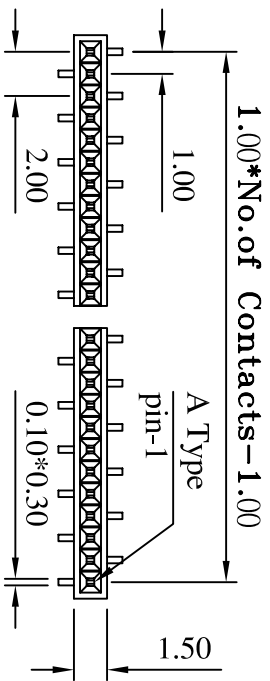


## A Type

Recommended P.C. Board  
SMD Layout

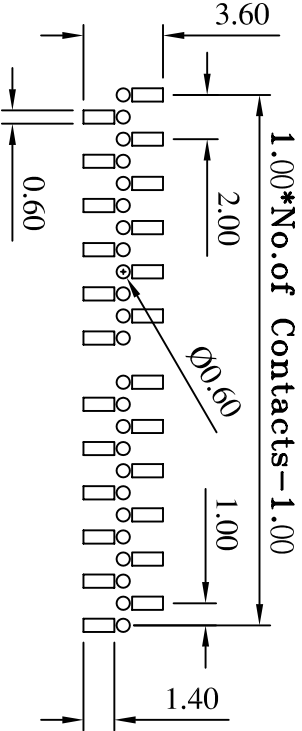


# B Type

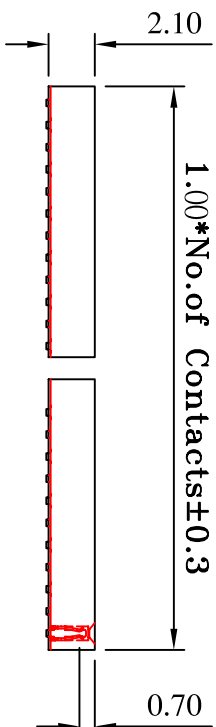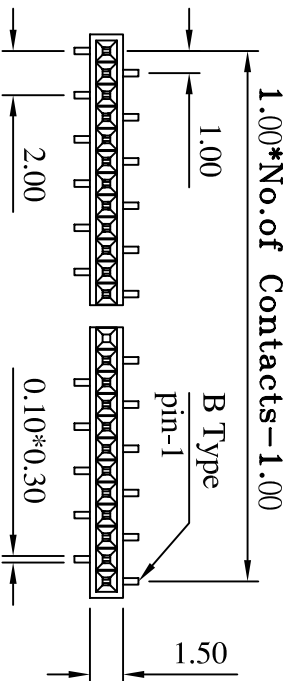

## B Type

## B Type

Recommended P.C. Board  
SMD Layout

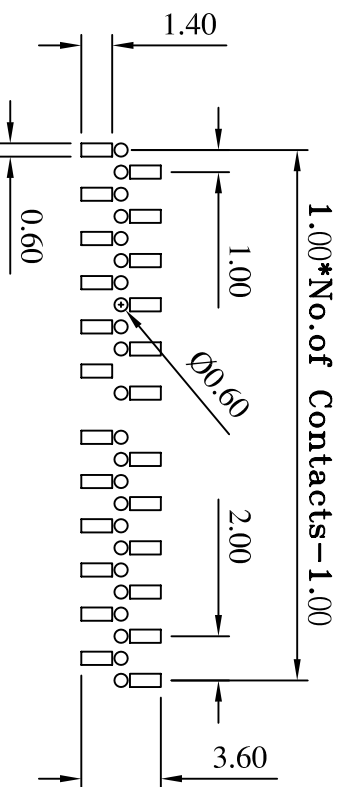

Current Rating: 1 Amps  
 Insulator Resistance: 1000 Megohms min  
 Contact Resistance: 20 m ohms max  
 Dielectric Withstanding: 300 V AC  
 Operating Temperature: -40° ~ +125° C  
 Max Processing Temp: 230° C for 60 seconds  
 260° C for 10 seconds  
 Contact Material: Phosphor Bronze  
 Insulator Material: Polyester; UL 94V-0  
 Standard: L.C.P

Finish: Tin, Gold Plated  
 Standard: Gold Flash all over nickel

(RoHS Compliant)  
(Halogen-Free)

P5 L 21 - 1 XX D0 BK X 000 X  
 1 2 3 4 5 6 7

- Standard: L=L.C.P. 5. Contact Plated: A=Gold 3u"
- Per ROW: 02-50 pig T=Matte Tin over Nickel D=Gold 5u"
- Tail Style: W=Matte Tin over Nickel 150u" G=Gold 10u"  
 DA=S.M.D A Type Y=Bright Tin over Nickel L=Gold 15u"  
 DB=S.M.D B Type C=Gold Flash U=Gold 30u"
- Color: BK=Black
- Special Options: 6. Special Options
- Packaging: 7. Packaging: B=Tube N=Tap & Reel



CONN TOP  
COMPONENT INC.

PART NO P5L21-1XXD0BKX000X

X ±0.3  
XX ±0.20  
XXX ±0.100

BOM 1: P5L21-1XXBKH0  
 2: P5L21T-1016-01D

DRAWING NO P100-00010

EDITION: C ITEM: P100

3:

DRAWN BY GARY

2008/06/17 SCALE: 1:1

TEL: (02)86481727 FAX: (02)86482427

APPROVAL BY

UNIT: m.m