


Current Rating: 1 Amps
 Insulator Resistance: 1000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 300 V AC
 Operating Temperature: -40° ~ +125° C
 Max Processing Temp: 230° C for 60 seconds
 260° C for 10 seconds
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester, UL 94V-0
 Standard:L.C.P
 Finish: Tin, Gold Plated
 Standard:Gold Flash all over nickel

Recommended P.C. Board
 SMD Layout

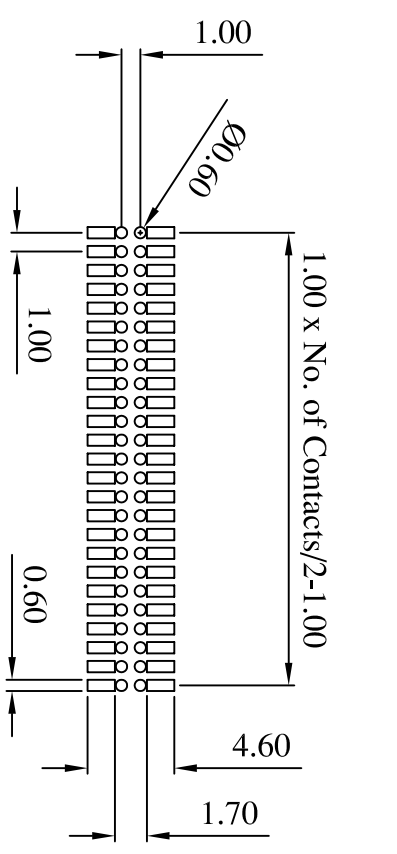

(RoHS Compliant)
 (Halogen-Free)
 P5 L 21 - 2 XX D0 BK X 000 X
 1 2 3 4 5 6 7

- Standard: L=L.C.P.
- Per ROW 03 to 50
- Taill Style: DO= SMD No Peg Type
- Color: BK=Black
- Contact Plated: A=Gold 3u", D=Gold 5u", G=Gold 10u", L=Gold 15u", U=Gold 30u"
- Special Options: T=Matte Tin over Nickel, W=Matte Tin over Nickel 150u", Y=Bright Tin over Nickel, C=Gold Flash
- Packaging: B= Tube, N= Tap & Reel

		PART NO	P5L21-2XXD0BKX000X	.X	.XX	.XXX
1:	P5L21-2XXBKHO	DRAWING NO	P100-00011	±0.3	±0.20	±0.100
2:	P5L21T-1016-01D	DRAWN BY	LN	EDITION: C	ITEM: P100	SCALE: 1:1
3:		APPROVAL BY		2009/02/13		
TEL:(02)86481727 FAX:(02)86482427						UNIT: m.m