
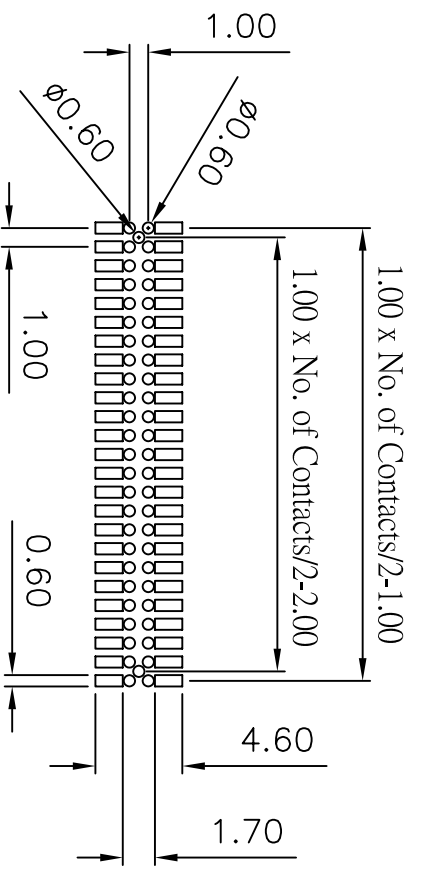


Current Rating: 1 Amps  
 Insulator Resistance: 1000 Megohms min  
 Contact Resistance: 20 m ohms max  
 Dielectric Withstanding: 300 V AC  
 Operating Temperature: -40° ~ +125° C  
 Max Processing Temp: 230° C for 60 seconds  
 260° C for 10 seconds  
 Phosphor Bronze  
 Polyester, UL 94V-0  
 Standard:L.C.P

Contact Material:  
 Insulator Material:  
 Finish: Tin, Gold Plated  
 Standard:Gold Flash all over nickel


Recommended P.C. Board  
 SMD Layout

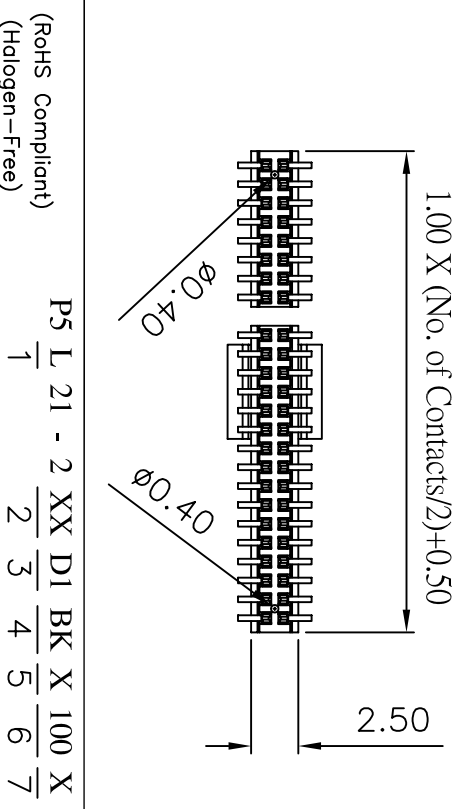

- Standard: L=L.C.P.
- Per ROW 03 to 50
- Tail Style:  
D1 = SMD With Peg Type
- Color: BK=Black
- Contact Plated:  
C=Gold Flash  
A=Gold 3u"  
D=Gold 5u"  
G=Gold 10u"  
L=Gold 15u"  
U=Gold 30u"
- Special Options  
7. Packing:  
E = CAP + Top & Reel  
F = CAP + Tube  
G = CAP + Tray  
H = CAP + Bag

(RoHS Compliant)  
 (Halogen-Free)

P5 L 21 - 2 XX D1 BK X 100 X  
 1 2 3 4 5 6 7

 CONN TOP COMPONENT INC.		PART NO		P5L21-2XXD1BKX100X		.X ±0.3	
I: P5L21-2XXBKHI BOM 2: P5L21T-1016-02D 3: CAP-P52-01		DRAWING NO		P100-00014		.XX ±0.20	
TEL:(02)86481727 FAX:(02)86482427		DRAWN BY		LIN		.XXX ±0.100	
APPROVAL BY		EDITION:		C		ITEM: P100	
		SCALE:		1:1		UNIT: m.m	